



This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should not therefore be construed as a warranty of specific properties of the products described or a warranty for fitness for a particular purpose.

Classified according to EU Directive 1999/45/EC

For further information see our "Material Safety Data Sheets".

Edition 7, 02.2008

The latest revised edition of this brochure is the English version, which is always published on our web site [www.uddeholm.com](http://www.uddeholm.com)



SS-EN ISO 9001  
SS-EN ISO 14001

---

## UDDEHOLM SLEIPNER

### THE CHANGING TOOLING ENVIRONMENT

The tooling environment is changing to suit the changing market environment. Lead times are one aspect of this change and they are getting shorter and shorter. This ultimately means that more emphasis has to be placed on tool reliability in service and on time to manufacture the tooling.

The production materials used nowadays are placing more demands on the tools and the tool steels used to manufacture them. For example, advanced high strength steel sheet materials now being used for automotive parts place extra demands on resistance to chipping and cracking, compressive strength and wear resistance.

### THE MODERN GENERAL COLD WORK TOOL STEEL

The classical 12 % Cr-steels such as AISI D2 or W.-Nr. 1.2379 are still the backbone of cold work tooling but their limitations are becoming more and more apparent in the changing production environment.

Uddeholm Sleipner is a new 8 % Cr-steel from Uddeholm Tooling. Its properties profile has been carefully balanced and the result is a very versatile tool steel which overcomes the limitations of the 12% Cr-steels.

### A VERSATILE TOOL STEEL

The properties profile of Uddeholm Sleipner is more versatile and superior to that of 12 % Cr-steels. The machinability, grindability and hardenability are much better and it is easier to make small repair welds. This means that Uddeholm Sleipner is the right choice for faster toolmaking, better tool performance and easier maintenance.

## General

Uddeholm Sleipner is a chromium-molybdenum-vanadium alloyed tool steel which is characterised by:

- Good wear resistance
- Good chipping resistance
- High compressive strength
- High hardness (>60 HRC) after high temperature tempering
- Good through-hardening properties
- Good stability in hardening
- Good resistance to tempering back
- Good WEDM properties
- Good machinability and grindability
- Good surface treatment properties

Typical analysis %	C	Si	Mn	Cr	Mo	V
	0,9	0,9	0,5	7,8	2,5	0,5
Standard spec.	None					
Delivery condition	Soft annealed to approx. 235 HB					
Colour code	Blue/brown					

## Applications

Uddeholm Sleipner is a general purpose steel for cold work tooling. It has a mixed-abrasive wear profile and a good resistance to chipping. Furthermore a high hardness (>60 HRC) can be obtained after high temperature tempering. This means that surface treatments such as nitriding or PVD can be made on a high strength substrate. Also, it means that complicated shapes with hardness levels >60 HRC can be wire EDM'd from blocks with relatively thick cross-sections with a much reduced risk of cracking.

Uddeholm Sleipner is recommended for medium run tooling applications where a resistance to mixed or abrasive wear and a good resistance to chipping are required.

*Examples:*

- Blanking and fine blanking
- Shearing
- Forming
- Coining
- Cold forging
- Cold extrusion
- Thread rolling
- Drawing and deep drawing
- Powder pressing

## Properties

### Physical data

Hardened and tempered to 62 HRC. Data at room and elevated temperatures.

Density kg/m <sup>3</sup> lbs/in <sup>3</sup>	7 730 0,279	7 680 0,277	7 620 0,275
Modulus of elasticity MPa ksi	205 000 297 000	190 000 276 000	180 000 261 000
Coefficient of thermal expansion —after low temperature tempering (60 HRC) per °C from 20°C per °F from 68°F —after high temperature tempering per °C from 20°C per °F from 68°F	— — — —	12,7 × 10 <sup>-6</sup> 7,1 × 10 <sup>-6</sup> 11,6 × 10 <sup>-6</sup> 6,4 × 10 <sup>-6</sup>	— — 12,4 × 10 <sup>-6</sup> 6,9 × 10 <sup>-6</sup>
Thermal conductivity W/m · °C Btu in/(ft <sup>2</sup> h °F)	— —	20 140	25 170
Specific heat J/kg · °C Btu/lb. · °F	460 0,11	— —	— —


### Compressive strength

The figures should be considered as approximate.

Hardness HRC	Compressive yield strength R <sub>c0,2</sub>	
	MPa	ksi
50	1 700	250
55	2 050	300
60	2 350	340
62	2 500	360
64	2 650	380


### Chipping resistance

Relative chipping resistance for Uddeholm Sverker 21, Uddeholm Sleipner and Uddeholm Rigor at the same hardness level.

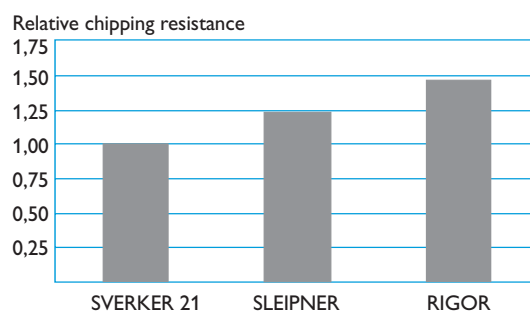

## Abrasive wear resistance

Relative abrasive wear resistance for Uddeholm Sverker 21, Uddeholm Sleipner and Uddeholm Rigor at the same hardness level (low value means better wear resistance).

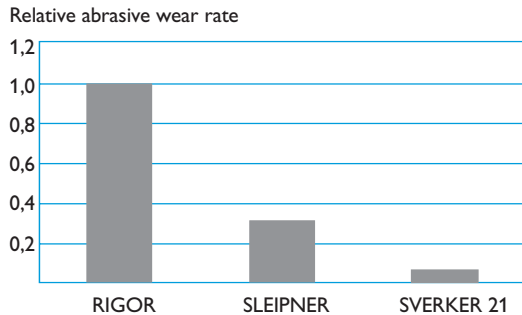

## Heat treatment

### Soft annealing

Protect the steel and heat through to 850°C (1560°F). Then cool in the furnace at 10°C (20°F) per hour to 650°C (1200°F), then freely in air.

### Stress relieving

After rough machining the tool should be heated through to 650°C (1200°F) and held for 2 hours. Cool slowly to 500°C (930°F) then freely in air.

### Hardening

*Preheating temperature:* 650–750°C (1200–1380°F).

*Austenitizing temperature:* 950–1080°C (1740–1980°F) but usually 1030–1050°C (1890–1920°F).

*Holding time:* 30 minutes


*Protect the part against decarburization and oxidation during hardening.*

## Quenching media

- Forced gas/circulating atmosphere
- Vacuum (high speed gas with sufficient overpressure)
- Martempering bath or fluidized bed at 500–550°C (930–1020°F)
- Martempering bath or fluidized bed at approx. 200–350°C (390–660°F)
- Oil (only very simple geometries)


*Note:* Temper the tool as soon as its temperature reaches 50–70°C (120–160°F)

## HARDNESS, RETAINED AUSTENITE AND GRAIN SIZE AS FUNCTION OF AUSTENITIZING TEMPERATURE

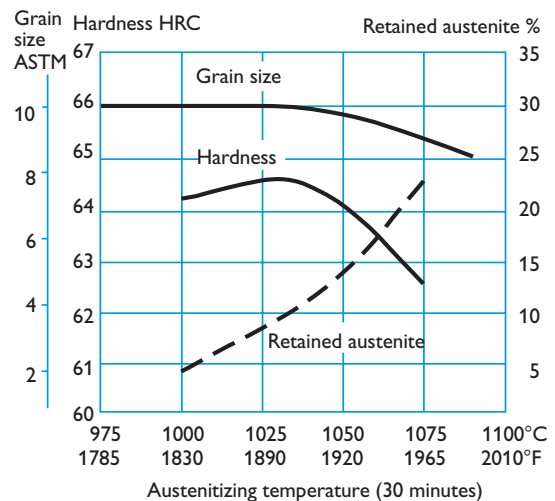


## Tempering

Choose the tempering temperature according to the hardness required by reference to the tempering graph. Temper at least twice with intermediate cooling to room temperature. The lowest tempering temperature which should be used is 180°C (360°F). The minimum holding time at temperature is 2 hours.

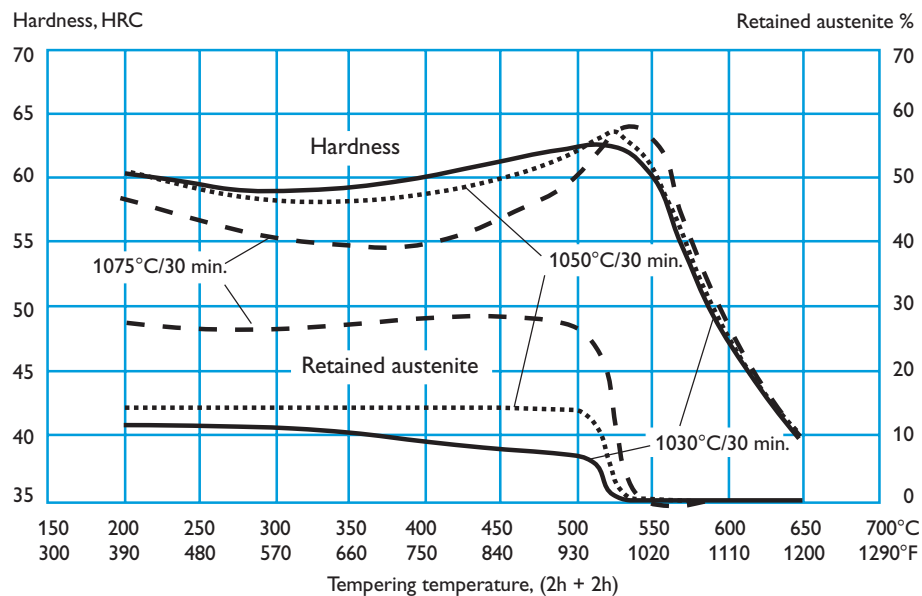


## CCT-GRAPH

Austenitizing temperature 1030°C (1890°F). Holding time 30 min.

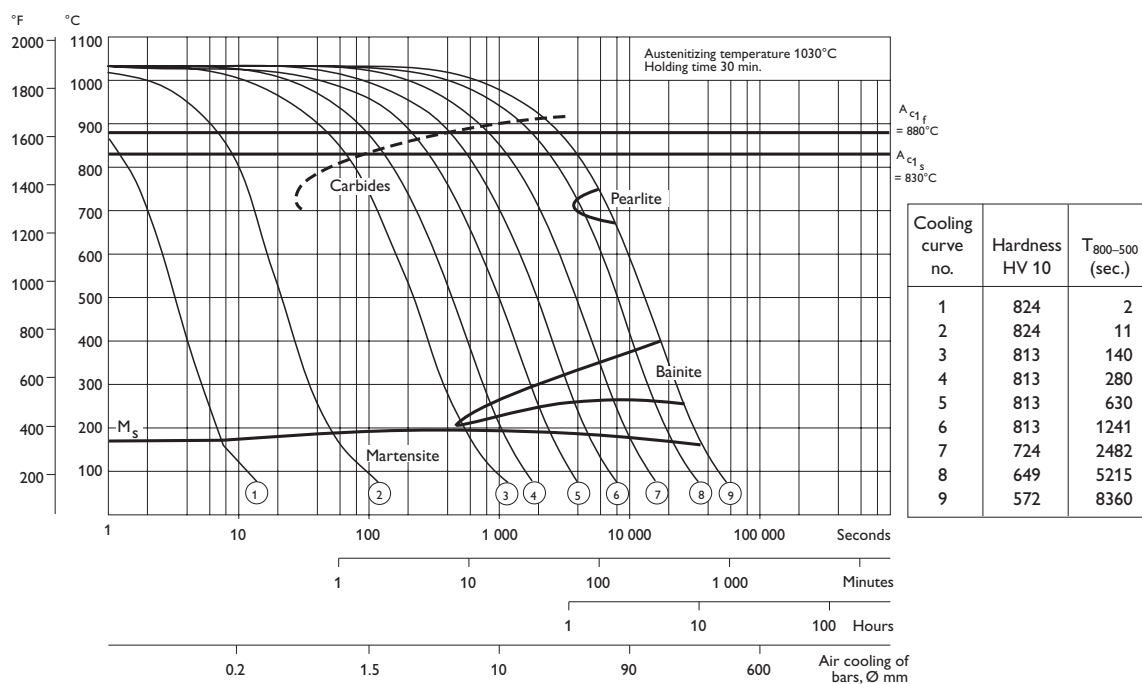

## TTT-GRAPH

Austenitizing temperature 1030°C (1890°F). Holding time 30 min.

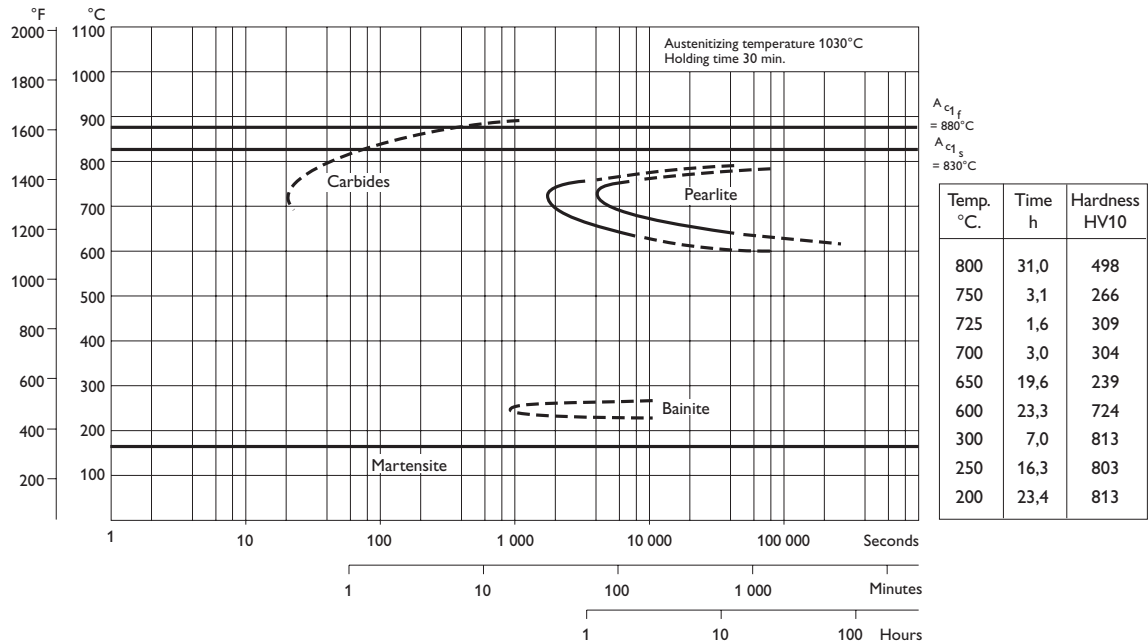

## Dimensional changes


The dimensional changes have been measured after austenitizing and tempering.

**Austenitizing:** 1030°C (1890°F)/30 min, cooling in vacuum furnace at 0,75°C/s (1,35°F/s) between 800°C (1470°F) and 500°C (930°F)

**Tempering:** 2 x 2 h at various temperatures

**Specimen size:** 100 x 100 x 100 mm

#### DIMENSIONAL CHANGES AS FUNCTION OF TEMPERING TEMPERATURE

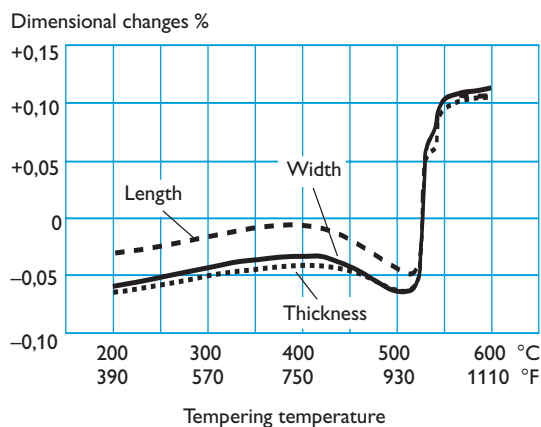

## Sub-zero treatment


Pieces requiring maximum dimensional stability in service should be sub-zero treated.

Sub-zero treatment reduces the amount of retained austenite and changes the hardness as shown in the diagram below.

**Austenitizing:** 1030°C (1890°F)/30 min

**Tempering:** 2 x 2 h at various temperatures

#### HARDNESS AND RETAINED AUSTENITE AS FUNCTION OF TEMPERING TEMPERATURE AND SUB-ZERO TREATMENT

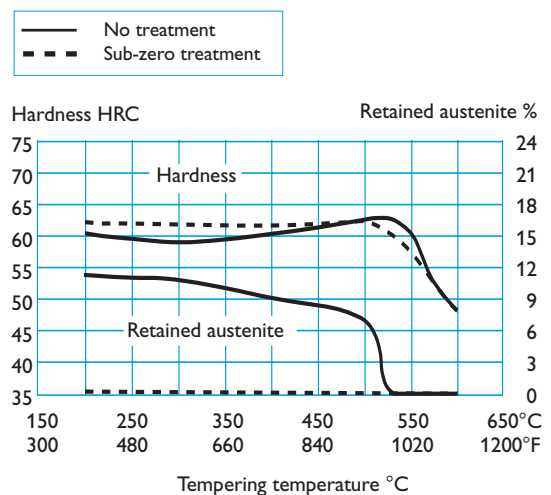

## Surface treatments

Some cold work tool steels are given a surface treatment in order to reduce friction and increase wear resistance. The most commonly used treatments are nitriding and surface coating with wear resistant layers produced via PVD or CVD.

The high hardness and good resistance to chipping together with a good dimensional stability make Uddeholm Sleipner suitable as a substrate steel for various surface coatings.

### Nitriding and nitrocarburizing

Nitriding and nitrocarburizing result in a hard surface layer which is very resistant to wear and galling. The surface hardness after nitriding is approximately 1100 HV<sub>0,2kg</sub>. The thickness of the layer should be chosen to suit the application in question.

### PVD

Physical vapour deposition, PVD, is a method of applying a wear-resistant coating at temperatures between 200–500°C (390–930°F).

### CVD

Chemical vapour deposition, CVD, is used for applying wear-resistant surface coatings at a temperature of around 1000°C (1830°F). It is recommended that the tools are separately hardened and tempered in a vacuum furnace after surface treatment.

## Machining recommendations

The cutting data below are to be considered as guide values which must be adapted to existing local conditions.

More information can be found in the Uddeholm publication "Cutting data recommendations".

*The recommendations in following tables are valid for Uddeholm Sleipner in soft annealed condition to approx. 235 HB.*

### Turning

Cutting data parameters	Turning with carbide		Turning with high speed steel
	Rough turning	Fine turning	Fine turning
Cutting speed (v <sub>c</sub> ), m/min. f.p.m.	100–150 328–492	150–200 492–656	17–22 56–72
Feed, (f) mm/rev i.p.r.	0,2–0,4 0,008–0,016	0,05–0,2 0,002–0,008	0,05–0,3 0,002–0,01
Depth of cut, (a <sub>p</sub> ) mm inch	2–4 0,08–0,16	0,5–2 0,02–0,08	0,5–3 0,02–0,12
Carbide designation ISO US	K20, P20 C2–C6 Coated carbide	K10, P15 C3, C7 Coated carbide	–

### Drilling

#### HIGH SPEED STEEL TWIST DRILL

Drill diameter		Cutting speed (v <sub>c</sub> )		Feed (f)	
mm	inch	m/min	f.p.m.	mm/rev	i.p.r.
– 5	– 3/16	13–18*	43–59*	0,05–0,10	0,002–0,004
5–10	3/16–3/8	13–18*	43–59*	0,10–0,20	0,004–0,008
10–15	3/8–5/8	13–18*	43–59*	0,20–0,25	0,008–0,010
15–20	5/8–3/4	13–18*	43–59*	0,25–0,30	0,010–0,012

\* For coated HSS drill v<sub>c</sub> 25–35 m/min. (82–115 f.p.m./min.)

#### CARBIDE DRILL

Cutting data parameters	Type of drill		
	Indexable insert	Solid carbide	Carbide tip <sup>1)</sup>
Cutting speed (v <sub>c</sub> ) m/min f.p.m.	140–160 460–525	80–100 262–328	45–55 148–180
Feed (f) mm/r i.p.r.	0,05–0,15 <sup>2)</sup> 0,002–0,006 <sup>2)</sup>	0,10–0,25 <sup>2)</sup> 0,004–0,01 <sup>2)</sup>	0,15–0,25 <sup>2)</sup> 0,006–0,01 <sup>2)</sup>

<sup>1)</sup> Drill with replaceable or brazed carbide tip

<sup>2)</sup> Depending on drill diameter



## Milling

### FACE AND SQUARE SHOULDER MILLING

Cutting data parameters	Milling with carbide	
	Rough milling	Fine milling
Cutting speed ( $v_c$ ) m/min f.p.m.	110–180 360–590	180–220 590–722
Feed ( $f_z$ ) mm/tooth inch/tooth	0,2–0,4 0,008–0,016	0,1–0,2 0,004–0,008
Depth of cut ( $a_p$ ) mm inch	2–5 0,08–0,2	–2 –0,08
Carbide designation ISO US	K20, P20 C2, C6 Coated carbide	P10–P20 C3–C7 Coated carbide

### END MILLING

Cutting data parameters	Type of milling		
	Solid carbide	Carbide indexable insert	High speed steel
Cutting speed ( $v_c$ ) m/min f.p.m.	80–120 262–394	100–140 328–460	13–18 <sup>1)</sup> 43–59 <sup>1)</sup>
Feed ( $f_z$ ) mm/tooth inch/tooth	0,03–0,20 <sup>2)</sup> 0,001–0,008 <sup>2)</sup>	0,08–0,20 <sup>2)</sup> 0,003–0,008 <sup>2)</sup>	0,05–0,35 <sup>2)</sup> 0,002–0,014 <sup>2)</sup>
Carbide designation ISO US	–	P15–P40 C6–C5	–

<sup>1)</sup> For coated HSS end mill  $v_c$  30–35 m/min. (98–115 f.p.m./min.)

<sup>2)</sup> Depending on radial depth of cut and cutter diameter

## Grinding

A general grinding wheel recommendation is given below. More information can be found in the Uddeholm publication "Grinding of tool steel".

Type of grinding	Soft annealed condition	Hardened condition
Face grinding straight wheel	A 46 HV	A 46 HV
Face grinding segments	A 24 GV	A 36 GV
Cylindrical grinding	A 46 LV	A 60 KV
Internal grinding	A 46 JV	A 60 JV
Profile grinding	A 100 KV	A 120 JV

## Welding

Good results when welding tool steel can be achieved if proper precautions are taken during the welding operation.

- The joints should be prepared properly.
- Repair welds should be made at elevated temperature. Make the two first layers with the same electrode diameter and/or current.
- Always keep the arc length as short as possible. The electrode should be angled at 90° to the joint sides to minimize undercut. In addition, the electrode should be held at an angle of 75–80° to the direction of forward travel.
- For large repairs, weld the initial layers with a soft filler material (buffering layer)

### Filler material

#### TIG WELDING CONSUMABLES

Filler Material	Hardness after welding
Type AWS ER312	300 HB (for buffering layers)
UTP A67S	55–58 HRC
UTP A696	60–64 HRC
CastoTig 5*	60–64 HRC
Caldie TIG-Weld	58–62 HRC

\* Should not be used for more than 4 layers because of the increased risk of cracking

#### MMA (SMAW) WELDING CONSUMABLES

Filler Material	Hardness after welding
Type AWS E312	300 HB (for buffering layers)
CASTOLIN 2	54–60 HRC
UTP 67S	55–58 HRC
UTP 69	60–64 HRC
CASTOLIN 6	60–64 HRC
Caldie Weld	58–62 HRC

### Preheating temperature

The temperature of the tool during the entire welding process should be maintained at an even level.

	Soft annealed	Hardened
Hardness	230 HB	60–62 HRC
Preheating temperature	250°C (480°F)	250°C (480°F)
Max. interpass-temperature	400°C (750°F)	400°C (750°F)

## Heat treatment after welding

	Soft annealed	Hardened
Hardness	230 HB	60–62 HRC
Cooling rate	20–40°C/h (40–80°F/h) for the first 2 hours then freely in air	
Heat treatment	Soft anneal Harden Temper	Temper 10–20°C (20–40°F) below the latest tempering temperature

More information on welding of tool steel can be found in the Uddeholm publication "Welding of Tool Steel".

## Flame hardening

Use oxy-acetylene equipment with a capacity of 800–1250 l/h. Oxygen pressure 2,5 bar, acetylene pressure 1,5 bar. Adjust to give neutral flame.

Temperature: 980–1020°C (1795–1870°F).  
Cool freely in air.

The hardness at the surface will be 58–62 HRC and 41 HRC (400 HB) at a depth of 3–3,5 mm (0,12–0,14").

## Electrical-discharge machining—EDM

If EDM is performed in the hardened and tempered condition, finish with a fine-sparking, i.e. low current, high frequency.

For optimal performance the EDM'd surface should be ground/polished and the tool re-tempered at approx. 25°C (80°F) lower than the original tempering temperature.

When EDM'ing larger sizes or complicated shapes Uddeholm Sleipner should be tempered at high temperature, above 500°C (930°F).


## Relative comparison of Uddeholm cold work tool steel

Material properties and resistance to failure mechanisms

Uddeholm grade	Hardness/ Resistance to plastic deformation	Machinability	Grindability	Dimension stability	Resistance to		Fatigue cracking resistance	
					Abrasive wear	Adhesive wear	Ductility/ resistance to chipping	Toughness/ gross cracking
ARNE								
CALMAX								
CALDIE (ESR)								
RIGOR								
SLEIPNER								
SVERKER 21								
SVERKER 3								
VANADIS 4 EXTRA								
VANADIS 6								
VANADIS 10								
VANADIS 23								

## Further information

Please contact your local Uddeholm office for further information on the selection, heat treatment, application and availability of Uddeholm tool steel.

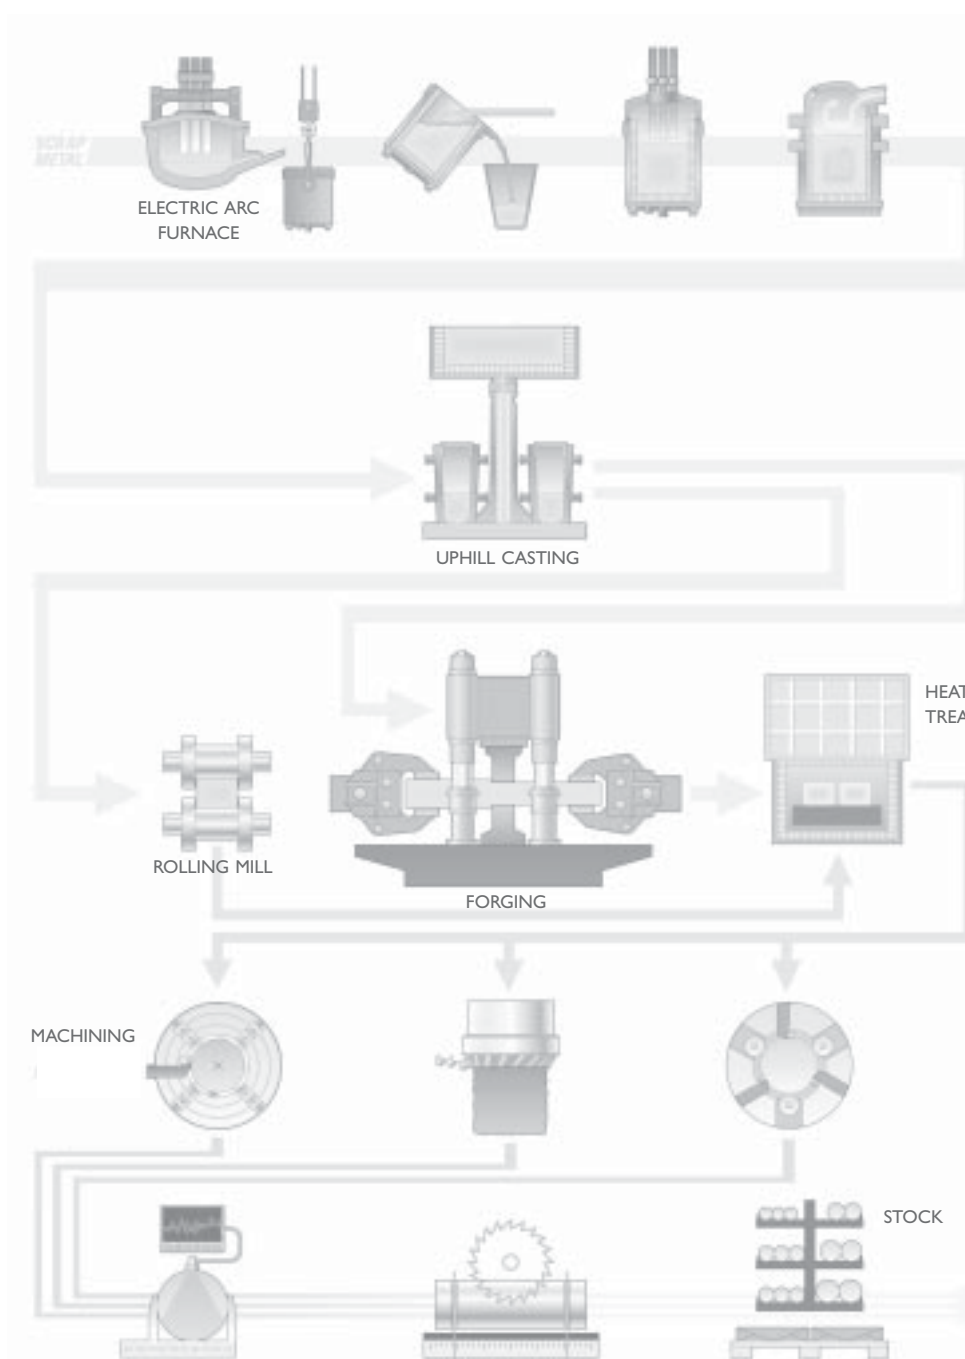

## The Conventional Tool Steel Process

The starting material for our tool steel is carefully selected from high quality recyclable steel. Together with ferroalloys and slag formers, the recyclable steel is melted in an electric arc furnace. The molten steel is then tapped into a ladle.

The de-slagging unit removes oxygen-rich slag and after the de-oxidation, alloying and heating of the steel bath are carried out in the ladle furnace. Vacuum de-gassing removes elements such as hydrogen, nitrogen and sulphur.

In uphill casting the prepared moulds are filled with a controlled flow of molten steel from the ladle. From this, the steel goes directly to our rolling mill or to the forging press to be formed into round or flat bars.

### HEAT TREATMENT

Prior to delivery all of the different bar materials are subjected to a heat treatment operation, either as soft annealing or hardening and tempering. These operations provide the steel with the right balance between hardness and toughness.

### MACHINING

Before the material is finished and put into stock, we also rough machine the bar profiles to required size and exact tolerances.

In the lathe machining of large dimensions, the steel bar rotates against a stationary cutting tool. In peeling of smaller dimensions, the cutting tools revolve around the bar.

To safeguard our quality and guarantee the integrity of the tool steel we perform both surface- and ultrasonic inspections on all bars. We then remove the bar ends and any defects found during the inspection.

# Europe

## Austria

### Representative office

UDDEHOLM  
Albstraße 10  
DE-73765 Neuhausen  
Telephone: +49 7158 9865-0  
www.uddeholm.de

## Belgium

UDDEHOLM  
Europark Oost 7  
B-9100 Sint-Niklaas  
Telephone: +32 3 780 56 20  
www.uddeholm.be

## Croatia

BÖHLER UDDEHOLM Zagreb  
d.o.o za trgovinu  
Zitnjak b.b  
10000 Zagreb  
Telephone: +385 1 2459 301  
Telefax: +385 1 2406 790  
www.bohler-uddeholm.hr

## Czech Republic

BÖHLER UDDEHOLM CZ s.r.o.  
Division Uddeholm  
U Silnice 949  
161 00 Praha 6, Ruzyně  
Telephone: +420 233 029 850,8  
www.uddeholm.cz

## Denmark

UDDEHOLM A/S  
Kokmose 8, Bramdrupdam  
DK-6000 Kolding  
Telephone: +45 75 51 70 66  
www.uddeholm.dk

## Estonia

UDDEHOLM TOOLING AB  
Silikatsiidi 7  
EE-11216 Tallinn  
Telephone: +372 655 9180  
www.uddeholm.ee

## Finland

OY UDDEHOLM AB  
Ritakuja 1, PL 57  
FI-01741 VANTAA  
Telephone: +358 9 290 490  
www.uddeholm.fi

## France

### Head office

UDDEHOLM  
Z.I. de Mitry-Compans, 12 rue Mercier,  
FR-77297 Mitry Mory Cedex  
Telephone: +33 (0)1 60 93 80 10  
www.uddeholm.fr

### Branch offices

UDDEHOLM S.A.  
77bis, rue de Vesoul  
La Nef aux Métiers  
FR-25000 Besançon  
Telephone: +33 (0)381 53 12 19

LE POINT ACIERS  
UDDEHOLM - Aciers à outils  
Z.I. du Recou, Avenue de Champlevert  
FR-69520 GRIGNY  
Telephone: +33 (0)4 72 49 95 61

LE POINT ACIERS  
UDDEHOLM - Aciers à outils  
Z.I. Nord 27, rue François Rochema  
FR-01100 OYONNAX  
Telephone: +33 (0)4 74 73 48 66

## Germany

### Head office

UDDEHOLM  
Hansaallee 321  
DE-40549 Düsseldorf  
Telephone: +49 211 5351-0  
www.uddeholm.de

### Branch offices

UDDEHOLM  
Falkenstraße 21  
DE-65812 Bad Soden/TS  
Telephone: +49 6196 6596-0

UDDEHOLM  
Albstraße 10  
DE-73765 Neuhausen  
Telephone: +49 7158 9865-0

UDDEHOLM  
Friederikenstraße 14b  
DE-06493 Harzgerode  
Telephone: +49 39484 727 267

## Great Britain

UDDEHOLM DIVISION  
BOHLER-UDDEHOLM (UK) LIMITED  
European Business Park  
Taylors Lane, Oldbury  
GB-West Midlands B69 2BN  
Telephone: +44 121 552 5511  
Telefax: +44 121 544 2911  
www.uddeholm.co.uk

## Greece

STASSINOPOULOS-UDDEHOLM  
STEEL TRADING S.A.  
20, Athinon Street  
GR-Piraeus 18540  
Telephone: +30 210 4172 109  
www.uddeholm.gr

SKLERO S.A.  
Heat Treatment and Trading of Steel  
Uddeholm Tool Steels  
Industrial Area of Thessaloniki  
P.O. Box 1123  
GR-57022 Sindos, Thessaloniki  
Telephone: +30 2310 79 76 46  
www.sklero.gr

## Hungary

UDDEHOLM TOOLING/BOK  
Dunaharaszti, Jedlik Ányos út 25  
HU-2331 Dunaharaszti 1. Pf. 110  
Telephone/fax: +36 24 492 690  
www.uddeholm.hu

## Ireland

### Head office:

UDDEHOLM DIVISION  
BOHLER-UDDEHOLM (UK) LIMITED  
European Business Park  
Taylors Lane, Oldbury  
UK-West Midlands B69 2BN  
Telephone: +44 121 552 5511  
Telefax: +44 121 544 2911  
www.uddeholm.co.uk  
Dublin:  
Telephone: +353 1845 1401

## Italy

UDDEHOLM  
Divisione della Bohler Uddeholm  
Italia S.p.A.  
Via Palizzi, 90  
IT-20157 Milano  
Telephone: +39 02 39 49 211  
www.uddeholm.it

## Latvia

UDDEHOLM TOOLING LATVIA SIA  
Piedrujas Street 7  
LV-1035 Riga  
Telephone: +371 7 702133  
latvia@assab.com

## Lithuania

UDDEHOLM TOOLING AB  
BE PLIENAS IR METALAI  
T. Masiulio 18B  
LT-52459 Kaunas  
Telephone: +370 37 370613, -669  
www.besteel.lt

## The Netherlands

UDDEHOLM  
Isolatorweg 30  
NL-1014 AS Amsterdam  
Telephone: +31 20 581 71 11  
www.uddeholm.nl

## Norway

UDDEHOLM A/S  
Jernkroken 18  
Postboks 85, Kalbakken  
NO-0902 Oslo  
Telephone: +47 22 91 80 00  
www.uddeholm.no

## Poland

BOHLER UDDEHOLM POLSKA  
Sp. z o.o./Co. Ltd.  
ul. Kolejowa 291, Dziekanów Polski,  
PL-05-092 Lomianki  
Telephone: +48 22 429 2260, -203, -204  
www.uddeholm.pl

## Portugal

F RAMADA Açores e Industrias S.A.  
P.O. Box 10  
PT-3881 Ovar Codex  
Telephone: +351 256 580580  
www.ramada.pt

## Romania

BÖHLER-UDDEHOLM Romania SRL  
Atomistilor Str. No 96-102  
077125 - com. Magurele, Jud. Ilfov.  
Telephone: +40 214 575007  
Telefax: +40 214 574212

## Russia

UDDEHOLM TOOLING CIS  
9A, Lipovaya Alleya, Office 509  
RU-197183 Saint Petersburg  
Telephone: +7 812 6006194  
www.uddeholm.ru

## Slovakia

Bohler-Uddeholm Slovakia s.r.o.  
divizia UDDEHOLM  
Čsl.Armády 5622/5  
SK-036 01 Martin  
Telephone: +421 (0)434 212 030  
www.uddeholm.sk

## Slovenia

### Representative office

UDDEHOLM  
Divisione della Bohler Uddeholm  
Italia S.p.A.  
Via Palizzi, 90  
IT-20157 Milano  
Telephone: +39 02 39 49 211  
www.uddeholm.it

## Spain

### Head office

UDDEHOLM  
Guifré 690-692  
ES-08918 Badalona, Barcelona  
Telephone: +34 93 460 1227  
www.acerosuddeholm.com

### Branch office

UDDEHOLM  
Barrio San Martín de Arteaga,132  
Pol.Ind. Torrelarragoiti  
ES-48170 Zamudio (Bizkaia)  
Telephone: +34 94 452 13 03

## Sweden

### Head office

UDDEHOLM TOOLING SVENSKA AB  
Aminogatan 25  
SE-431 53 Mölndal  
Telephone: +46 31 67 98 50  
www.uddeholm.se

### Branch offices

UDDEHOLM TOOLING SVENSKA AB  
Box 45  
SE-334 21 Anderstorp  
Telephone: +46 371 160 15

UDDEHOLM TOOLING SVENSKA AB  
Box 148  
SE-631 03 Eskilstuna  
Telephone: +46 16 15 79 00

UDDEHOLM TOOLING SVENSKA AB  
Aminogatan 25  
SE-431 53 Mölndal  
Telephone: +46 31 67 98 70

UDDEHOLM TOOLING SVENSKA AB  
Nya Tanneforsvägen 96  
SE-582 42 Linköping  
Telephone: +46 13 15 19 90

UDDEHOLM TOOLING SVENSKA AB  
Derbyvägen 22  
SE-212 35 Malmö  
Telephone: +46 40 22 32 05

UDDEHOLM TOOLING SVENSKA AB  
Honnörsgratan 24  
SE-352 36 Växjö  
Telephone: +46 470 457 90

## Switzerland

HERTSCH & CIE AG  
General Wille Strasse 19  
CH-8027 Zürich  
Telephone: +41 44 208 16 66  
www.hertsch.ch

## Turkey

### Head office

ASSAB Korkmaz Celik A.S.  
Organize Sanayi Bölgesi  
2. Cadde No: 26 Y. Dudulla  
34776 Umraniye  
TR-Istanbul  
Telephone: +90 216 420 1926  
www.assabkorkmaz.com

# America

## Argentina

ACEROS BOHLER UDDEHOLM S.A  
Mozart 40  
1619-Centro Industrial Garin  
Garin-Prov.  
AR-Buenos Aires  
Telephone: +54 332 7444 440  
www.uddeholm.com.ar

## Brazil

AÇOS BOHLER-UDDEHOLM DO  
BRASIL LTDA- DIV. UDDEHOLM  
Estrada Yae Massumoto, 353  
CEP 09842-160  
BR-Sao Bernardo do Campo - SP Brazil  
Telephone: +55 11 4393 4560, 4554  
www.uddeholm.com.br

## Canada

*Head Office & Warehouse*  
BOHLER-UDDEHOLM LIMITED  
2595 Meadowvale Blvd.  
Mississauga, ON L5N 7Y3  
Telephone: +1 905 812 9440  
www.bucanada.com

*Branch Warehouses*  
BOHLER-UDDEHOLM LIMITED  
3521 Rue Ashby  
St. Laurent, QC H4R 2K3  
Telephone: +1 514 333 8000

BOHLER-UDDEHOLM LIMITED  
730 Eaton Way - Unit #10  
New Westminster, BC V3M 6J9  
Telephone: +1 604 525 3354

*Heat Treating*  
BOHLER-UDDEHOLM  
THERMO-TECH  
2645 Meadowvale Blvd.  
Mississauga, ON L5N 7Y4  
Telephone: +1 905 812 9440

## Colombia

AXXECOL S.A.  
Carrera 35 No 13-20  
Apartado Aereo 80718  
CO-Bogota 6  
Telephone: +57 1 2010700  
www.axxecol.com

ASTECO S.A.  
Carrera 54 No 35-12  
Apartado Aereo 663  
CO-Medellin  
Telephone: +57 4 2320122  
www.asteco.com

## Dominican Republic

RAMCA, C. POR A.  
P-2289  
P.O. Box 025650  
Miami, FL 33102  
Telephone: +1 809 682 4011  
domrep@assab.com

## Ecuador

IVAN BOHMAN C.A.  
Apartado 1317  
Km 6 1/2 Via a Daule  
Guayaquil  
Telephone: +593 42 254111  
www.ivanbohman.com.ec

IVAN BOHMAN C.A.  
Casilla Postal 17-01370  
Quito  
Telephone: +593 2 2248001  
www.ivanbohman.com.ec

## El Salvador

ACAVIDA DE C.V.  
25 Ave. Sur, no 763  
Zona 1  
SV-San Salvador  
Telephone: +503 22 71 1700  
www.acavisa.com

## Guatemala

IMPORTADORA ESCANDINAVA  
Apartado postal 11C  
GT-Guatemala City  
Telephone: +502 23 659270  
guatemala@assab.com

## Honduras

ACAVIDA DE C.V.  
25 Ave. Sur, no 763  
Zona 1  
SV-San Salvador  
Telephone: +503 22 71 1700  
www.acavisa.com

## Mexico

*Head office*  
ACEROS BOHLER UDDEHOLM S.A.  
de C.V.  
Calle Ocho No 2, Letra "C"  
Fraccionamiento Industrial Alce Blanco  
C.P. 52787 Naucalpan de Juarez  
MX-Estado de Mexico  
Telephone: +52 55 9172 0242  
www.bu-mexico.com

*Branch office*  
BOHLER-UDDEHOLM MONTERREY,  
NUEVO LEON  
Lerdo de Tejada No.542  
Colonia Las Villas  
MX-66420 San Nicolas de Los Garza,  
N.L.  
Telephone: +52 81 83 525239

## Peru

C.I.P.E.S.A.  
Av. Oscar R. Benavides  
(ante Colonial) No. 2066  
PE-Lima 1  
Telephone: +51 1 336 8673  
peru@assab.com

## U.S.A.

*Head office and Warehouse*  
BOHLER-UDDEHOLM  
CORPORATION  
2505 Millennium Drive  
Elgin IL 60124  
Telephone: 1-630-883-3000 or  
1-800-652-2520  
Sales phone: 1-800-638-2520  
www.bucorp.com

*Region East Warehouse*  
BOHLER-UDDEHOLM  
CORPORATION  
548 Clayton Ct.  
Wood Dale IL 60191

*Region Central Warehouse*  
BOHLER-UDDEHOLM  
CORPORATION  
548 Clayton Ct.  
Wood Dale IL 60191

*Region West Warehouse*  
BOHLER-UDDEHOLM  
CORPORATION  
9331 Santa Fe Springs Road  
Santa Fe Springs, CA 90670

## Venezuela

PRODUCTOS HUMAR C.A.  
Av. Bolivar, Zona Industrial  
La Trinidad  
Edificio. Distribuidora Agrofor, C.A.  
Piso 3, VE-Caracas 1080  
Telephone: +58 212 942 1994 or  
+58 212 915 7073  
humar@assab.com

## Other Countries in America

ASSAB INTERNATIONAL AB  
Box 42  
SE-171 11 Solna, Sweden  
Telephone: +46 8 564 616 70  
www.assab.se

# Asia & Pacific

## Australia

BOHLER UDDEHOLM Australia  
129-135 McCredie Road  
Guildford NSW 2161  
Private Bag 14  
AU-Sydney  
Telephone: +61 2 9681 3100  
www.buau.com.au

## Bangladesh

ASSAB INTERNATIONAL AB  
P.O. Box 17595  
Jebel Ali  
AE-Dubai  
Telephone: +971 488 12165  
www.assab.se

## North China

*Head office*  
ASSAB Tooling (Beijing) Co Ltd  
No.10A Rong Jing Dong Jie  
Beijing Economic Development Area  
Beijing 100176, China  
Telephone: +86 10 6786 5588  
www.assabsteels.com

*Branch offices*  
ASSAB Tooling (Beijing) Ltd  
Dalian Branch  
8 Huanghai Street, Haerbin Road  
Economic & Technical Develop. District  
Dalian 116600, China  
Telephone: +86 411 8761 8080

ASSAB Qingdao Office  
Room 2521, Kexin Mansion  
No. 228 Liaoning Road, Shibei District  
Qingdao 266012, China  
Telephone: +86 532 8382 0930

ASSAB Tianjin Office  
No.12 Puwangli Xincheng  
Xinyibai Road, Beichen District  
Tianjin 300402, China  
Telephone: +86 22 2672 0006

## Central China

*Head office*  
ASSAB Tooling Technology  
(Shanghai) Co Ltd  
No. 4088 Humin Road  
Xinzhuan Industrial Zone  
Shanghai 201108, China  
Telephone: +86 21 5442 2345  
www.assabsteels.com

*Branch offices*  
ASSAB Tooling Technology  
(Ningbo) Co Ltd  
No. 218 Longjiaoshan Road  
Vehicle Part Industrial Park  
Ningbo Economic & Technical Dev.  
Zone  
Ningbo 315806, China  
Telephone: +86 574 8680 7188

ASSAB Tooling Technology  
(Chongqing) Co Ltd  
Plant C, Automotive Industrial IPark  
Chongqing Economic & Technological  
Development Zone  
Chongqing 401120, China  
Telephone: +86 23 6745 5698

## South China

*Head office*  
ASSAB Steels (HK) Ltd  
Room 1701-1706  
Tower 2 Grand Central Plaza  
138 Shatin Rural Committee Road  
Shatin NT - Hong Kong  
Telephone: +852 2487 1991  
www.assabsteels.com

## Branch offices

ASSAB Tooling (Dongguan) Co Ltd  
Northern District  
Song Shan Lake Science & Technology  
Industrial Park  
Dongguan 523808, China  
Telephone: +86 769 2289 7888  
www.assabsteels.com

ASSAB Tooling (Xiamen) Co Ltd  
First Floor Universal Workshop  
No. 30 Huli Zone  
Xiamen 361006, China  
Telephone: +86 592 562 4678

## Hong Kong

ASSAB Steels (HK) Ltd  
Room 1701-1706  
Grand Central Plaza, Tower 2  
138 Shatin Rural Committee Road  
Shatin NT, Hong Kong  
Telephone: +852 2487 1991  
www.assabsteels.com

## India

ASSAB Sripad Steels LTD  
T 303 D.A.V. Complex  
Mayur Vihar Ph I Extension  
IN-Delhi-110 091  
Telephone: +91 11 2271 2736  
www.assabsripad.com

ASSAB Sripad Steels LTD  
709, Swastik Chambers  
Sion-Trombay Road  
Chembur  
IN-Mumbai-400 071  
Telephone: +91 22 2522-7110, -8133  
www.assabsripad.com

ASSAB Sripad Steels LTD  
Padmalaya Towers  
Janaki Avenue  
M.R.C. Nagar  
IN-Chennai-600 028  
Telephone: +91 44 2495 2371  
www.assabsripad.com

ASSAB Sripad Steels LTD  
19X, D. P. P. Road  
Naktola Post Office  
IN-Kolkata-700 047  
Telephone: +91 (40) 2377 8148  
www.assabsripad.com

ASSAB Sripad Steels LTD  
Ground floor, Plot No 11-6-8  
Opp IDPL Factory Out Gate  
Balanagar  
IN-Hyderabad-500 037  
Telephone: +91 (40) 2377 8148  
www.assabsripad.com

## Indonesia

*Head office*  
PT ASSAB Steels Indonesia  
Jl. Rawagelam III No. 5  
Kawasan Industri Pulogadung  
Jakarta 13930, Indonesia  
Telephone: +62 21 461 1314  
www.assabsteels.com

#### Branch offices

**SURABAYA BRANCH**  
Jl. Berbek Industri 1/23  
Surabaya Industrial Estate, Rungkut  
Surabaya 60293, East Java, Indonesia  
Telephone: +62 31 843 2277

**MEDAN BRANCH**  
Komplek Griya Riatur Indah  
Blok A No.138  
Jl. T. Amir Hamzah  
Halvetia Timur, Medan 20124  
Telephone: +62 61 847 7935/6

**BANDUNG BRANCH**  
Komp. Ruko Bumi Kencana  
Jl. Titian Kencana Blok E  
No.5 Bandung 40233  
Telephone: +62 22 604 1364

**TANGERANG BRANCH**  
Pusat Niaga Cibodas  
Blok C No. 7 Tangerang  
Telephone: +62 21 921 9596, 551 2732

**SEMARANG BRANCH**  
Jl. Imam Bonjol No.155  
R.208 Semarang 50124  
Telephone: +62 358 8167

#### Iran

**ASSAB INTERNATIONAL AB**  
P.O. Box 19395  
IR-1517 TEHRAN  
Telephone: +98 21 888 35392  
www.assabiran.com

#### Israel

**PACKER YADPAZ QUALITY STEELS Ltd**  
P.O. Box 686  
Ha-Yarkon St. 7, Industrial Zone  
IL-81106 YAVNE  
Telephone: +972 8 932 8182  
www.packer.co.il

#### Japan

**UDDEHOLM KK**  
Atago East Building  
3-16-11 Nishi Shinbashi  
Minato-ku, Tokyo 105-0003, Japan  
Telephone: + 81 3 5473 4641  
www.assabsteels.com

#### Jordan

**ENGINEERING WAY Est.**  
P.O. Box 874  
Abu Alanda  
JO-AMMAN 11592  
Telephone: +962 6 4161962  
engineeringway@assab.com

#### Malaysia

*Head office*  
**ASSAB Steels (Malaysia) Sdn Bhd**  
Lot 19, Jalan Perusahaan 2  
Batu Caves Industrial Estate  
68100 Batu Caves  
Selangor Malaysia  
Telephone: +60 3 6189 0022  
www.assabsteels.com

#### Branch offices

**BUTTERWORTH BRANCH**  
Plot 146a  
Jalan Perindustrial Bukit Minyak 7  
Kawasan Perindustrial Bukit Minyak  
14000 Bukit Mertajam, SPT Penang  
Telephone: +60 4 507 2020

**JOHOR BRANCH**  
No. 8, Jalan Persiaran Teknologi  
Taman Teknologi  
81400 Senai  
Johor DT, Malaysia  
Telephone: +60 7 598 0011

#### New Zealand

**VIKING STEELS**  
25 Beach Road, Otahuhu  
P.O. Box 13-359, Onehunga  
NZ-Auckland  
Telephone: +64 9 270 1199  
www.ssm.co.nz

#### Pakistan

**ASSAB International AB**  
P.O. Box 17595  
Jebel Ali  
AE-Dubai  
Telephone: +971 488 12165  
www.assab.se

#### Philippines

**ASSOCIATED SWEDISH STEELS PHILS Inc.**  
No. 3 E. Rodriguez Jr., Avenue  
Bagong Ilog, Pasig City  
Philippines  
Telephone: +632 671 1953/2048  
www.assabsteels.com

#### Republic of Korea

*Head office*  
**ASSAB Steels (Korea) Co Ltd**  
116B-8L, 687-8, Kojan-dong  
Namdong-ku  
Incheon 405-310, Korea  
Telephone: +82 32 821 4300  
www.assabsteels.com

#### Branch offices

**BUSAN BRANCH**  
14B-5L, 1483-9, Songjeong-dong  
Kangseo-ku, Busan 618-270, Korea  
Telephone: +82 51 831 3315

**DAEGU BRANCH**  
Room 27, 7-Dong2 F  
Industry Materials Bldg.1629  
Sangyeog-Dong, Buk-Ku  
Korea-Daegu 702-710  
Telephone: +82 53 604 5133

#### Lebanon

**WARDE STEEL & METALS SARL MET**  
Charles Helou Av, Warde Bldg  
P.O. Box 165886  
LB-Beirut  
Telephone: +961 1 447228  
lebanon@assab.com

#### Saudi Arabia

**ASSAB INTERNATIONAL AB**  
P.O. Box 255092  
SA-Riyadh 11353  
Telephone: +966 1 4466542  
assab@emirates.net.ae

#### Singapore

*Head office Pacific*  
**ASSAB Pacific Pte Ltd**  
171, Chin Swee Road  
No. 07-02, SAN Centre  
SG-Singapore 169877  
Telephone: +65 6534 5600  
www.assabsteels.com

#### Jurong

**ASSAB Steels Singapore (Pte) Ltd**  
18, Penjuru Close  
SG-608616 Singapore  
Telephone: +65 6862 2200

#### Sri Lanka

**GERMANIA COLOMBO PRIVATE Ltd.**  
451/A Kandy Road  
LK-Kelaniya  
Telephone: +94 11 2913556  
www.iwsholdings.com

#### Syria

**WARDE STEEL & METALS SARL MET**  
Charles Helou Av, Warde Bldg  
P.O. Box 165886  
LB-Beirut  
Telephone: +961 1 447228  
lebanon@assab.com

#### Taiwan

*Head office*  
**ASSAB Steels (Taiwan) Co Ltd**  
No. 112 Wu Kung 1st Rd.  
Wu Ku Industry Zone  
TW-Taipai 248-87, Taiwan (R.O.C.)  
Telephone: +886 2 2299 2849  
www.assabsteels.com

#### Branch offices

**NANTOU BRANCH**  
No. 10, Industry South 5th Road  
Nan Kang Industry Zone  
Nantou 540-66, Taiwan (R.O.C.)  
Telephone: +886 49 225 1702  
**TAINAN BRANCH**  
No. 180, Yen He Street,  
Yong Kang City  
Tainan 710-82, Taiwan (R.O.C.)  
Telephone: +886 6 242 6838

#### Thailand

**ASSAB Steels (Thailand) Ltd**  
9/8 Soi Theedintai,  
Taeparak Road, Bangplee,  
Samutprakarn 10540, Thailand  
Telephone: +66 2 385 5937,  
+66 2 757 5017  
www.assabsteels.com

#### United Arab Emirates

**ASSAB INTERNATIONAL AB**  
P.O. Box 17595  
Jebel Ali  
AE-Dubai  
Telephone: +971 488 12165  
www.assab.se

#### Vietnam

**CAM Trading Steel Co Ltd**  
90/8 Block 5, Tan Thoi Nhat Ward  
District 12, Ho Chi Minh City  
Vietnam  
Telephone: +84 8 5920 920  
www.assabsteels.com

#### Other Asia

**ASSAB INTERNATIONAL AB**  
Box 42  
E-171 11 Solna, Sweden  
Telephone: +46 8 564 616 70  
www.assab.se

## Africa

#### Egypt

**MISR SWEDEN FOR ENGINEERING IND.**  
Montaser Project No 20  
Flat No 14  
Al Ahram Street-El Tabia  
EG-Giza Cairo  
Telephone: +20 2 7797751  
www.assab.se

#### Kenya

**SANDVIK Kenya Ltd**  
P.O. Box 18264  
Post code 00500  
KE-Nairobi  
Telephone: +254 20 532 866  
info@sandvik.co.ke

#### Morocco

**MCM Distribution**  
4 Bis, Rue 8610 - Z.I.  
2035 Chargaia 1  
TN-Tunis  
Telephone: + 216 71 802 479

#### South Africa

**UDDEHOLM Africa (Pty.) Ltd.**  
P.O. Box 539  
ZA-1600 Isando/Johannesburg  
Telephone: +27 11 974 2791  
www.bohler-uddeholm.co.za

#### Tunisia

**MCM Distribution**  
4 Bis, Rue 8610 - Z.I.  
2035 Chargaia 1  
TN-Tunis  
Telephone: + 216 71 802 479  
www.mcm.com.tn


#### Zimbabwe

*Representative office:*  
**UDDEHOLM Africa (Pty.) Ltd.**  
P.O. Box 539  
ZA-1600 Isando/Johannesburg  
Telephone: +27 11 974 2781  
www.bohler-uddeholm.co.za

#### Other African Countries

**ASSAB INTERNATIONAL AB**  
Box 42  
SE-171 11 Solna, Sweden  
Telephone: +46 8 564 616 70  
www.assab.se



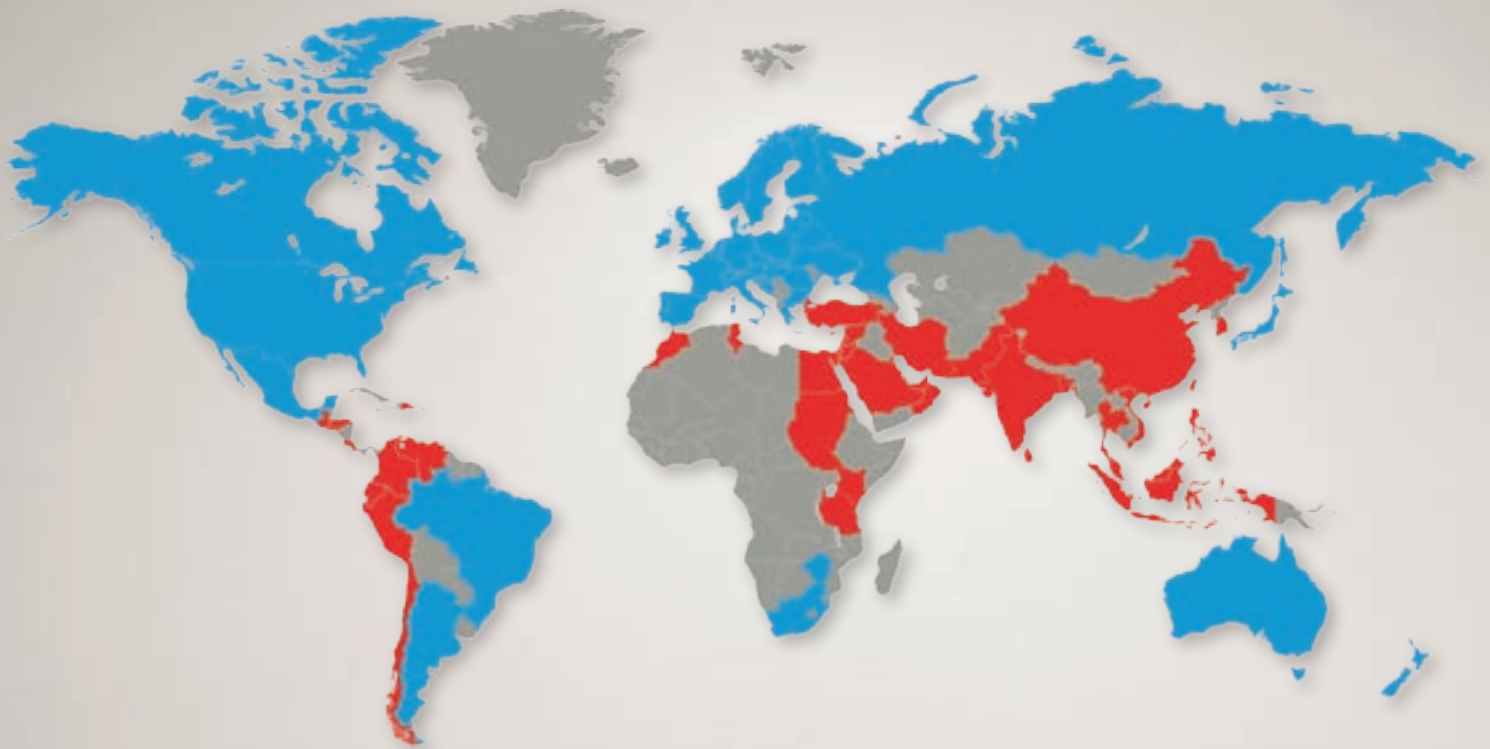

## Network of excellence

Uddeholm is present on every continent. This ensures you high-quality Swedish tool steel and local support wherever you are. Assab is our wholly-owned subsidiary and exclusive sales channel, representing Uddeholm in various parts of the world. Together we secure our position as the world's leading supplier of tooling materials.

Uddeholm is the world's leading supplier of tooling materials. This is a position we have reached by improving our customers' everyday business. Long tradition combined with research and product development equips Uddeholm to solve any tooling problem that may arise. It is a challenging process, but the goal is clear – to be your number one partner and tool steel provider.

Our presence on every continent guarantees you the same high quality wherever you are. Assab is our wholly-owned subsidiary and exclusive sales channel, representing Uddeholm in various parts of the world. Together we secure our position as the world's leading supplier of tooling materials. We act worldwide, so there is always an Uddeholm or Assab representative close at hand to give local advice and support. For us it is all a matter of trust – in long-term partnerships as well as in developing new products. Trust is something you earn, every day.

For more information, please visit [www.uddeholm.com](http://www.uddeholm.com) or [www.assab.com](http://www.assab.com)