



This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should not therefore be construed as a warranty of specific properties of the products described or a warranty for fitness for a particular purpose.

Classified according to EU Directive 1999/45/EC

For further information see our "Material Safety Data Sheets".

Edition 6, 09.2007

The latest revised edition of this brochure is the English version, which is always published on our web site [www.uddeholm.com](http://www.uddeholm.com)



SS-EN ISO 9001  
SS-EN ISO 14001

---

## UDDEHOLM VANCRON 40

Uddeholm Vancron 40 is a nitrided powder tool steel, which means that a “surface coating” is already integrated into the finished tooling material. The result is a tool surface with very low friction that reduces galling or sticking of soft work materials.

In several cold work applications like forming of e.g. aluminium, stainless steel and mild steel, galling and adhesive wear are often the dominating tooling problems. This could also be the case in powder compacting, cold extrusion and blanking or shearing of different work materials. One common way of coping with this type of problem is to use different kinds of surface coatings like CVD, PVD or TD (Toyota Diffusion).

Uddeholm Vancron 40 offers the possibility of eliminating these time- and cost-consuming surface coatings. This is achieved in the manufacturing process of Uddeholm Vancron 40 by introducing an extra nitriding operation. Uddeholm has spent a lot of time and resources in this development, and can now launch a completely new type of PM tool steel with a special kind of internal surface coating.

Benefits for the tool user include improved and consistent quality of the manufactured parts, especially regarding the surfaces. More reliable delivery time and higher utilization of the production equipment are also benefits, with fewer disturbances and interruptions in production. Further improvements include simplified maintenance, which can often be made in-house as no surface coating is required; and as well, total tool life is increased.

The tool maker can produce a high quality tool that does not require any surface coating, which means a shorter delivery time and freedom to make adjustments after the heat treatment.

In total this means that the product quality will be uniform from the first part produced to the last and that a tool manufactured in Uddeholm Vancron 40 will make it easier for you to keep your delivery time commitments.

## Critical tool steel properties

### For good tool performance

In many cold work applications tools are surface coated in order to prevent galling and adhesive wear.

Furthermore it is important to have the correct hardness for the applications as well as a sufficient ductility and toughness in order to prevent premature failure due to chipping/crack formation.

Uddeholm Vancron 40 is a nitrided powder metallurgical tool steel offering an excellent combination of galling resistance and adhesive wear resistance.

### For tool making

- Machinability
- Heat treatment
- Grinding
- Dimensional stability in heat treatment
- Surface treatment

Tool making with highly alloyed tool steels means that machining and heat treatment are often more of a problem than with the lower alloy grades. This can, of course, raise the cost of tool making.

The powder manufacturing route used for Uddeholm Vancron 40 means that its machinability is superior to that of similar conventionally produced grades and some highly alloyed cold work tool steels.

The dimensional stability of Uddeholm Vancron 40 in heat treatment is good and predictable compared to conventionally produced high alloy steels.

Uddeholm Vancron 40 is designed to be used without surface coating as it contains a high amount of low friction vanadium rich nitrides in the matrix.

## Applications

Uddeholm Vancron 40 is a cold work tool steel with an excellent galling/adhesive wear profile, which makes the steel ideal for severe production conditions and/or long run production in applications where surface coated tool steel is needed. The work materials in these applications are often soft/adherent materials such as austenitic and ferritic stainless steel, mild steel, copper, aluminium, etc.

Uddeholm Vancron 40 should be used in cold work applications where the predominant failure mechanisms are adhesive wear or galling.

Typical applications are:

- Blanking and forming
- Cold extrusion
- Deep drawing
- Powder pressing

## General

Uddeholm Vancron 40 is a Cr-Mo-W-V-N alloyed cold work tool steel, which is characterized by:

- Very high adhesive wear resistance
- Very high galling resistance
- Good chipping and cracking resistance
- High compressive strength
- Good through hardening properties
- Good dimensional stability in hardening
- Very good resistance to tempering back
- Good WEDM properties

Typical analysis %	C	N	Si	Mn	Cr	Mo	W	V
	1,1	1,8	0,5	0,4	4,5	3,2	3,7	8,5
Standard specification	None							
Delivery condition	Soft annealed to approx. 300 HB							
Colour code	Gold/ Dark blue							

## Properties

### Physical data

After hardening and tempering to 61 HRC

Temperature	20°C (68°F)	200°C (390°F)	400°C (750°F)
Density kg/m <sup>3</sup> lbs/in <sup>3</sup>	7 700 0,278	–	–
Modulus of elasticity MPa ksi	209 000 30 × 10 <sup>3</sup>	201 500 29 × 10 <sup>3</sup>	195 000 28 × 10 <sup>3</sup>
Coefficient of thermal expansion per °C from 20°C °F from 68°F	–	11,1 × 10 <sup>-6</sup> 6,1 × 10 <sup>-6</sup>	11,9 × 10 <sup>-6</sup> 6,6 × 10 <sup>-6</sup>
Thermal conductivity W/m · °C Btu in/ft <sup>2</sup> h °F	–	21 ± 2 145 ± 14	25 ± 0,5 173 ± 3
Specific heat J/kg °C Btu /lb °F	460 0,11	–	–


### Compressive strength

Approximately compressive strength vs. hardness is shown in the table below.

Hardness HRC	Compressive yield strength R <sub>c0,2</sub> (MPa)
58	2200
60	2500
62	2700
64	3000

### Unnotched impact energy

Unnotched impact energy for Uddeholm grades Uddeholm Vanadis 6, Uddeholm Vancron 40, Uddeholm Vanadis 10, and AISI D2 is shown below.

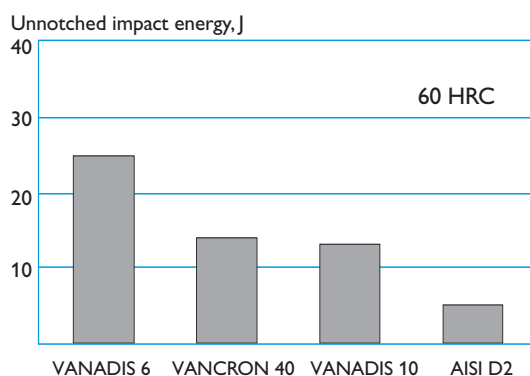

## Heat treatment

### Soft annealing

Protect the steel and heat through to 900°C (1650°F). Then cool in the furnace at 10°C/h (20°F/h) to 650°C (1200°F), then freely in air.

### Stress relieving

After rough machining the tool should be heated through to 600–700°C (1110–1290°F), holding time 2 hours. Cool slowly to 500°C (930°F), then freely in air.

### Hardening

The hardenability for Uddeholm Vancron 40 is equivalent to Uddeholm Vanadis 23, which ensures good through hardening properties at quenching in salt bath or gas quenching in vacuum furnace.

*Pre-heating in two stages:* 600–650°C (1110–1200°F) and 850–900°C (1560–1650°F).


*Austenitizing temperature:* 1000–1100°C (1830–2010°F) normally 1020°C (1870°F).

*Holding time:* 30 minutes (10 minutes at 1100°C (2010°F)).

*The tool should be protected against decarburization and oxidation during hardening.*


Uddeholm Vancron 40 can be heat treated to give a wide range of hardness. To achieve a hardness between 58–65 HRC the austenitizing temperature is varied in the range 950–1100°C (1740–2010°F). The recommended austenitizing temperature is 1020°C (1865°F) with 30 minutes holding time followed by quenching and tempering at 560°C (1040°F)/3 × 1 h resulting in a hardness of 60–62 HRC.

In order to avoid a too low working hardness it is recommended to austenitize at a higher hardening temperature than normal and if the hardness will be too high temper down the hardness to the right hardness level.

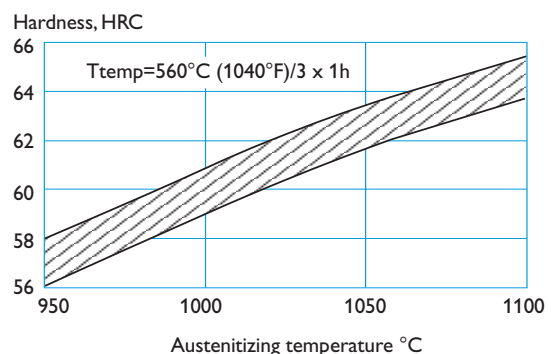


## CCT-GRAPH (CONTINUOUS COOLING)

Austenitizing temperature 1050°C (1920°F). Holding time 30 minutes.

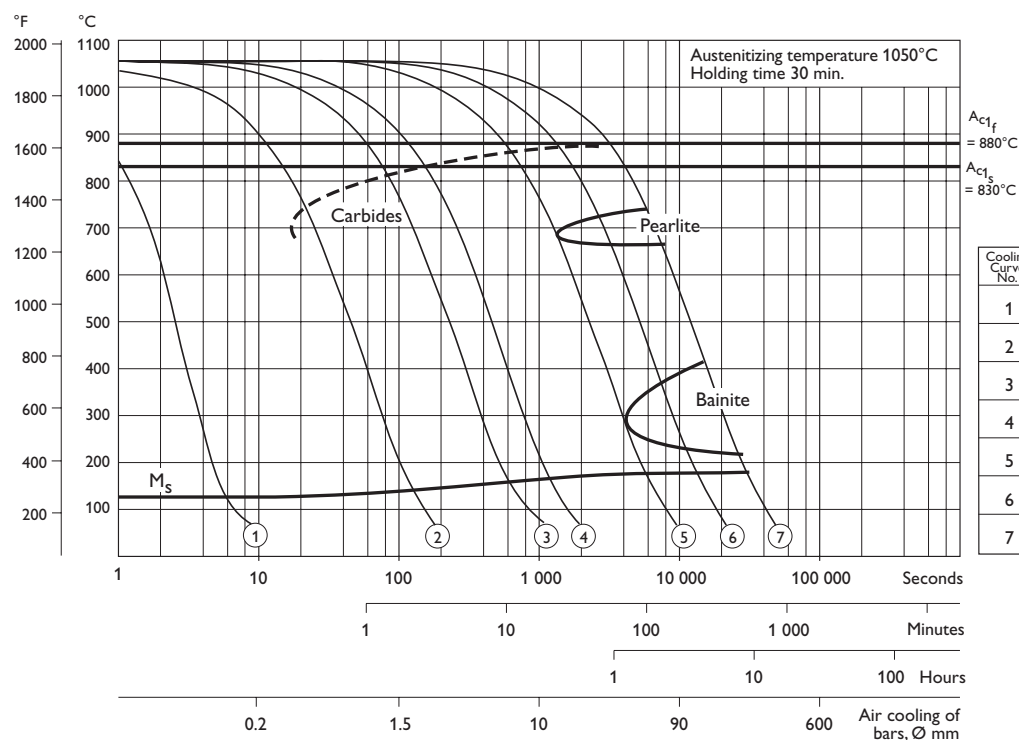

## TTT-GRAPH (ISOTHERMAL TRANSFORMATION)

Austenitizing temperature 1050°C (1920°F). Holding time 30 minutes.

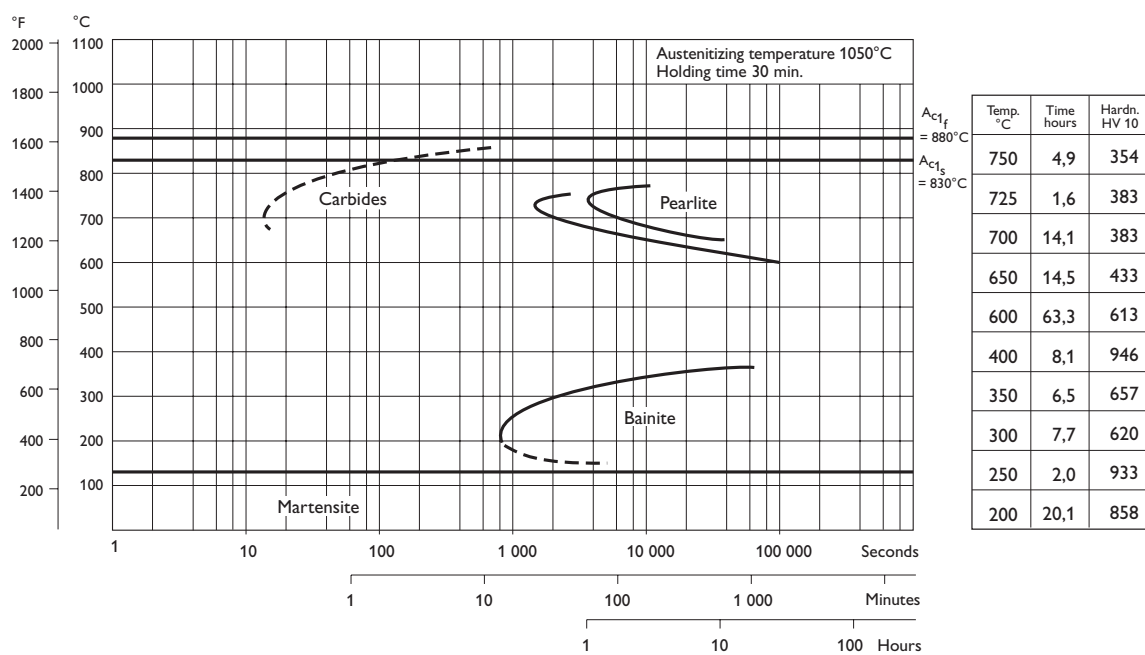

## Quenching media

- Vacuum furnace with high speed gas at sufficient overpressure (2–5 bar)
- Martempering bath or fluidized bed at approx. 550°C (1020°F)
- Forced air/gas

*Note 1:* Quenching should be continued until the temperature of the tool reaches approx. 50°C (120°F). The tool should then be tempered immediately.

*Note 2:* For applications where maximum toughness is required use a martempering bath or a furnace with sufficient overpressure.

## Tempering

For cold work applications tempering should always be carried out at 560°C (1040°F) irrespective of the austenitizing temperature. Temper three times for one hour at full temperature. The tool should be cooled to room temperature between the tempers.

The retained austenite content will be less than 3% after this tempering cycle.

## Dimensional changes

Dimensional changes after hardening and tempering.

*Heat treatment:* austenitizing between 950–1100°C (1740–2010°F)/30 minutes and tempering 3 x 1 h at 560°C (1040°F).

*Specimen size:* 50 x 50 x 50 mm (2" x 2" x 2") and 100 x 40 x 20 mm (4" x 1,5" x 1").

*Dimensional changes:* growth in length, width and thickness +0,04% to +0,20%.


## Sub-zero treatment

Tools requiring maximum dimension stability in service can be sub-zero treated as follows:


For the highest requirements on dimensional stability sub-zero treatment in liquid nitrogen is recommended after quenching and after each tempering at 560°C.

In less critical cases immediately after quenching, the tool should be sub-zero treated to at least -70°C to -80°C (-95°F to -110°F), soaking time 1 – 3 hours, followed by tempering at 560°C (1040°F) x three times.

The sub-zero treatment leads to a reduction of the retained austenite content. For a high hardening temperature > 1100°C (2010°F), we always recommend sub-zero treatment followed by four temperings at 560°C (1040°F), in order to reduce the retained austenite and improve the dimensional stability.

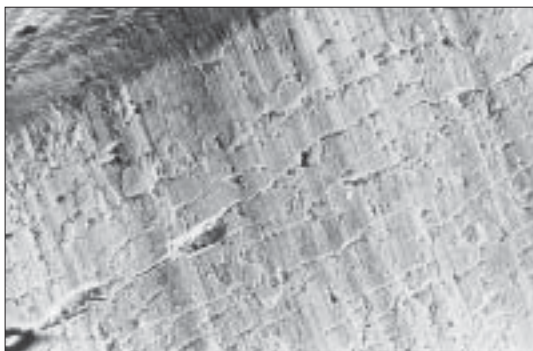

Adhesive wear.

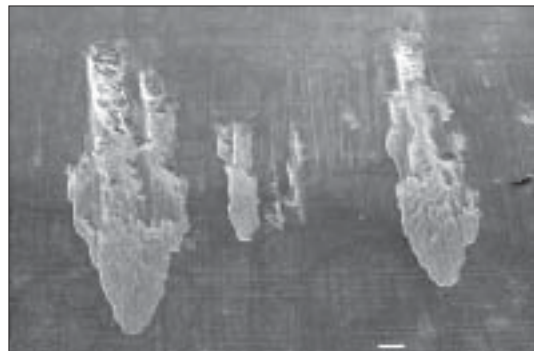

Galling.

## Surface treatments

*Note:* Uddeholm Vancron 40 is designed to be used without surface coating as it contains a high amount of nitrogen.

Some cold-work tools are given a surface treatment in order to reduce friction and increase tool wear resistance. The most commonly used treatments are nitriding and surface coating with wear resistant layers of titanium carbide and titanium nitride (CVD, PVD).

Uddeholm Vancron 40 is normally not needed to be surface coated by PVD/CVD or nitriding. However, Uddeholm Vancron 40 can be surface coated like other PM steels.

### Nitriding

A brief immersion in a special salt bath to produce a nitrided diffusion zone of 2–20  $\mu\text{m}$  is recommended. This reduces the friction on the envelope surface of punches and has various other advantages.

### PVD

Physical vapour deposition, PVD, is a method of applying a wear-resistant coating at temperatures between 200–500°C (390–930°F). As Uddeholm Vancron 40 is high temperature tempered at 560°C (1040°F) there is no danger of dimensional changes during PVD coating.

### CVD

Chemical vapour deposition, CVD, is used for applying wear-resistant surface coatings at a temperature of around 1000°C (1830°F). It is recommended that the tools should be separately hardened and tempered in a vacuum furnace after surface treatment.

## Wear resistance

### ADHESIVE WEAR




Wear resistance comparison.

*Component:* laboratory test strip.

*Tool type:* blanking punch.

*Tool dimension:* 10 x 40 mm.

*Work material:* 18/8 stainless steel SS 2331  
1 mm thick.

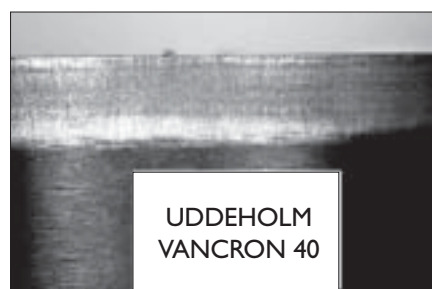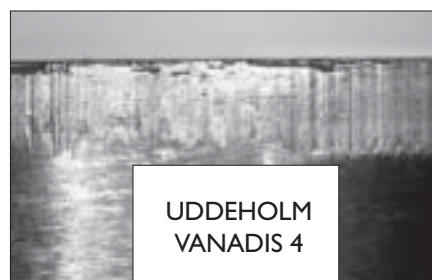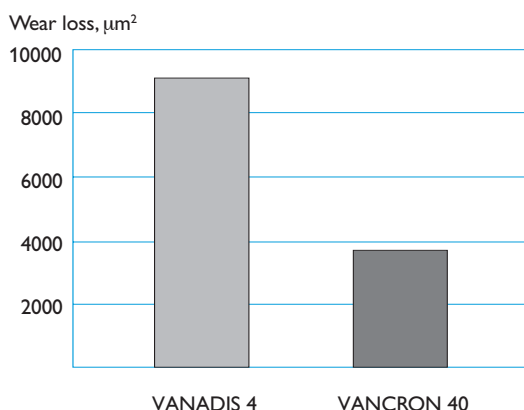


## Tribological properties

### RESULTS

Uddeholm Steel /Surface coating	VANADIS 23 uncoated	VANADIS 6 uncoated	VANADIS 10 uncoated	VANCRON 40 uncoated
Part Produced	83 000	800 000	1 900 000	>16 000 000
Hardness HRC	62			64
Failure mechanism	Galling			Still running

Uddeholm Steel /Surface coating	VANADIS 23		
	Salt bath nitriding	PVD TiN	CVD TiC/TiN
Part Produced	160 000	130 000	2 000 000
Hardness HRC	62		
Failure mechanism	Galling		Delamination

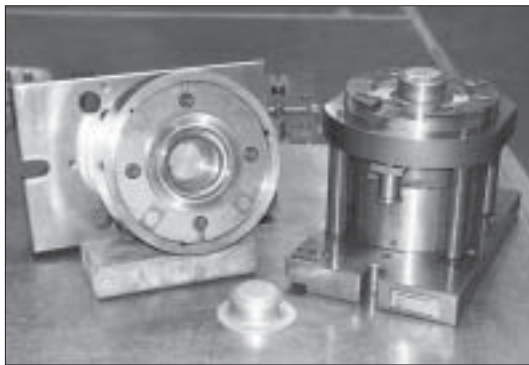

Cold forming die for producing a part of stainless steel for pump housing. Courtesy: Grundfos A/S, Denmark.

## Cutting data recommendations

The cutting data below are to be considered as guiding values which must be adapted to existing local condition.

The machinability of Uddeholm Vancron 40 corresponds to that of Uddeholm Vanadis 23.

### Turning

Cutting data parameters	Turning with carbide		Turning with HSS Fine turning
	Rough turning	Fine turning	
Cutting speed ( $v_c$ ) m/min f.p.m.	110–160 361–525	160–200 525–660	20–25 22–83
Feed ( $f$ ) mm/r i.p.r.	0,2–0,4 0,008–0,016	0,05–0,2 0,002–0,008	0,05–0,3 0,002–0,012
Depth of cut ( $a_p$ ) mm inch	2–4 0,08–0,16	0,5–2 0,02–0,08	0,5–3 0,02–0,12
Carbide designation ISO	K20* Coated carbide	K15* Coated carbide or cermet	–

\* Use a wear resistant  $Al_2O_3$  coated carbide grade

### Drilling

#### HIGH SPEED STEEL TWIST DRILL

Drill diameter		Cutting speed $v_c$		Feed $f$	
mm	inch	m/min.	f.p.m.	mm/r	i.p.r.
– 5	– 3/16	12–14*	40–46*	0,05–0,10	0,002–0,004
5–10	3/16–3/8	12–14*	40–46*	0,10–0,20	0,004–0,008
10–15	3/8–5/8	12–14*	40–46*	0,20–0,25	0,008–0,010
15–20	5/8–3/4	12–14*	40–46*	0,25–0,35	0,010–0,014

\* For coated HSS drill  $v_c = 22–24$  m/min. (72–79 f.p.m.)

#### CARBIDE DRILL

Cutting data parameters	Type of drill		
	Indexable insert	Solid carbide	Brazed carbide <sup>1)</sup>
Cutting speed, $v_c$ m/min f.p.m.	140–160 462–528	80–100 264–330	50–60 165–197
Feed, $f$ mm/r i.p.r.	0,05–0,15 <sup>2)</sup> 0,002–0,006 <sup>2)</sup>	0,10–0,25 <sup>2)</sup> 0,004–0,010 <sup>2)</sup>	0,15–0,25 <sup>2)</sup> 0,006–0,010 <sup>2)</sup>

<sup>1)</sup> Drill with internal cooling channels and brazed carbide tip

<sup>2)</sup> Depending on drill diameter

## Milling

### FACE AND SQUARE SHOULDER MILLING

Cutting data parameters	Milling with carbide	
	Rough milling	Fine milling
Cutting speed ( $v_c$ ) m/min f.p.m.	80–100 262–330	100–120 330–396
Feed ( $f_z$ ) mm/tooth inch/tooth	0,2–0,4 0,008–0,016	0,1–0,2 0,004–0,008
Depth of cut ( $a_p$ ) mm inch	2–4 0,08–0,16	–2 –0,08
Carbide designation ISO	K20* Coated carbide	K15* Coated carbide or cermet

\* Use a wear resistant  $Al_2O_3$  coated carbide grade

## Electrical-discharge machining, EDM

If EDM is performed in the hardened and tempered condition, finish with “fine-sparking”, i.e. low current, high frequency. For optimal performance the EDM'd surface should then be ground/polished and the tool retempered at approx. 535°C (995°F).

### END MILLING

Cutting data parameters	Type of mill		
	Solid carbide	Carbide indexable insert	High speed steel
Cutting speed ( $v_c$ ) m/min f.p.m.	40–50 132–164	70–90 230–297	12–15 <sup>1)</sup> 40–50 <sup>1)</sup>
Feed ( $f_z$ ) mm/tooth inch/tooth	0,01–0,2 <sup>2)</sup> 0,0004–0,008 <sup>2)</sup>	0,06–0,2 <sup>2)</sup> 0,002–0,008 <sup>2)</sup>	0,01–0,3 <sup>2)</sup> 0,0004–0,012 <sup>2)</sup>
Carbide designation ISO	–	K15 <sup>3)</sup>	–

<sup>1)</sup> For coated HSS end mill  $v_c = 20–30$  m/min. (66–99 f.p.m.)

<sup>2)</sup> Depending on radial depth of cut and cutter diameter

<sup>3)</sup> Use a wear resistant  $Al_2O_3$  coated carbide grade

## Grinding

General grinding wheel recommendation is given below. More information can be found in the Uddeholm publication “Grinding of Tool Steel”.

Type of grinding	Annealed condition	Hardened condition
Face grinding straight wheel	A 46 HV	B151 R50 B3 <sup>1)</sup> A 46 HV
Face grinding segments	A 36 GV	A 46 GV
Cylindrical grinding	A 60 KV	B151 R50 B3 <sup>1)</sup> A 60 KV
Internal grinding	A 60 JV	B151 R75 B3 <sup>1)</sup> A 60 IV
Profile grinding	A 100 IV	B126 R100 B6 <sup>1)</sup> A 100 JV

<sup>1)</sup> If possible use CBN wheels for this application

# Relative comparison of Uddeholm cold work tool steel

## Material properties and resistance to failure mechanisms

Uddeholm grade	Hardness/ Resistance to plastic deformation	Machin- ability	Grind- ability	Dimension stability	Resistance to		Fatigue cracking resistance	
					Abrasive wear	Adhesive wear/Galling	Ductility/ resistance to chipping	Toughness/ gross cracking
Conventional cold work tool steel								
ARNE								
CALMAX								
CALDIE (ESR)								
RIGOR								
SLEIPNER								
SVERKER 21								
SVERKER 3								
Powder metallurgical tool steel								
VANADIS 4 Extra								
VANADIS 6								
VANADIS 10								
VANCRON 40								
Powder metallurgical high speed steel								
VANADIS 23								
VANADIS 30								
VANADIS 60								
Conventional high speed steel								
AISI M2								

## Further information

Please contact your local Uddeholm office for further information on the selection, heat treatment, application and availability of Uddeholm tool steels. For more information, please visit [www.uddeholm.com](http://www.uddeholm.com)

# Europe

## Austria

*Representative office*  
UDDEHOLM  
Albstraße 10  
DE-73765 Neuhausen  
Telephone: +49 7158 9865-0  
www.uddeholm.de

## Belgium

UDDEHOLM  
Europark Oost 7  
B-9100 Sint-Niklaas  
Telephone: +32 3 780 56 20  
www.uddeholm.be

## Croatia

BÖHLER UDDEHOLM Zagreb  
d.o.o za trgovinu  
Zitnjak b.b  
10000 Zagreb  
Telephone: +385 1 2459 301  
Telefax: +385 1 2406 790  
www.bohler-uddeholm.hr

## Czech Republic

BÖHLER UDDEHOLM CZ s.r.o.  
Division Uddeholm  
U Silnice 949  
161 00 Praha 6, Ruzyně  
Telephone: +420 233 029 850,8  
www.uddeholm.cz

## Denmark

UDDEHOLM A/S  
Kokmose 8, Bramdrupdam  
DK-6000 Kolding  
Telephone: +45 75 51 70 66  
www.uddeholm.dk

## Estonia

UDDEHOLM TOOLING AB  
Silikatsiidi 7  
EE-11216 Tallinn  
Telephone: +372 655 9180  
www.uddeholm.ee

## Finland

OY UDDEHOLM AB  
Ritakuja 1, PL 57  
FI-01741 VANTAA  
Telephone: +358 9 290 490  
www.uddeholm.fi

## France

*Head office*  
UDDEHOLM  
Z.I. de Mitry-Compans, 12 rue Mercier,  
FR-77297 Mitry Mory Cedex  
Telephone: +33 (0)1 60 93 80 10  
www.uddeholm.fr

### Branch offices

UDDEHOLM S.A.  
77bis, rue de Vesoul  
La Nef aux Métiers  
FR-25000 Besançon  
Telephone: +33 (0)381 53 12 19

LE POINT ACIERS  
UDDEHOLM - Aciers à outils  
Z.I. du Recou, Avenue de Champlevvert  
FR-69520 GRIGNY  
Telephone: +33 (0)4 72 49 95 61

LE POINT ACIERS  
UDDEHOLM - Aciers à outils  
Z.I. Nord 27, rue François Rochaix  
FR-01100 OYONNAX  
Telephone: +33 (0)4 74 73 48 66

## Germany

*Head office*  
UDDEHOLM  
Hansaallee 321  
DE-40549 Düsseldorf  
Telephone: +49 211 5351-0  
www.uddeholm.de

### Branch offices

UDDEHOLM  
Falkenstraße 21  
DE-65812 Bad Soden/TS  
Telephone: +49 6196 6596-0

UDDEHOLM  
Albstraße 10  
DE-73765 Neuhausen  
Telephone: +49 7158 9865-0

UDDEHOLM  
Friederikenstraße 14b  
DE-06493 Harzgerode  
Telephone: +49 39484 727 267

## Great Britain

UDDEHOLM DIVISION  
BOHLER-UDDEHOLM (UK) LIMITED  
European Business Park  
Taylors Lane, Oldbury  
GB-West Midlands B69 2BN  
Telephone: +44 121 552 5511  
Telefax: +44 121 544 2911  
www.uddeholm.co.uk

## Greece

STASSINOPOULOS-UDDEHOLM  
STEEL TRADING S.A.  
20, Athinon Street  
GR-Piraeus 18540  
Telephone: +30 210 4172 109  
www.uddeholm.gr

SKLERO S.A.  
Heat Treatment and Trading of Steel  
Uddeholm Tool Steels  
Industrial Area of Thessaloniki  
P.O. Box 1123  
GR-57022 Sindos, Thessaloniki  
Telephone: +30 2310 79 76 46  
www.sklero.gr

## Hungary

UDDEHOLM TOOLING/BOK  
Dunaharaszti, Jedlik Ányos út 25  
HU-2331 Dunaharaszti 1. Pf. 110  
Telephone/fax: +36 24 492 690  
www.uddeholm.hu

## Ireland

*Head office:*  
UDDEHOLM DIVISION  
BOHLER-UDDEHOLM (UK) LIMITED  
European Business Park  
Taylors Lane, Oldbury  
UK-West Midlands B69 2BN  
Telephone: +44 121 552 5511  
Telefax: +44 121 544 2911  
www.uddeholm.co.uk  
*Dublin:*  
Telephone: +353 1845 1401

## Italy

UDDEHOLM  
Divisione della Bohler Uddeholm  
Italia S.p.A.  
Via Palizzi, 90  
IT-20157 Milano  
Telephone: +39 02 39 49 211  
www.uddeholm.it

## Latvia

UDDEHOLM TOOLING LATVIA SIA  
Piedrujas Street 7  
LV-1035 Riga  
Telephone: +371 7 702133  
Telefax: +371 7 185079

## Lithuania

UDDEHOLM TOOLING AB  
BE PLIENAS IR METALAI  
T. Masiulio 18B  
LT-52459 Kaunas  
Telephone: +370 37 370613, -669  
www.besteel.lt

## The Netherlands

UDDEHOLM  
Isolatorweg 30  
NL-1014 AS Amsterdam  
Telephone: +31 20 581 71 11  
www.uddeholm.nl

## Norway

UDDEHOLM A/S  
Jernkroken 18  
Postboks 85, Kalbakken  
NO-0902 Oslo  
Telephone: +47 22 91 80 00  
www.uddeholm.no

## Poland

BOHLER UDDEHOLM POLSKA  
Sp. z o.o./Co. Ltd.  
ul. Kolejowa 291, Dziekanów Polski,  
PL-05-092 Lomianki  
Telephone: +48 22 429 2260, -203, -204  
www.uddeholm.pl

## Portugal

F RAMADA Açores e Industrias S.A.  
P.O. Box 10  
PT-3881 Ovar Codex  
Telephone: +351 256 580580  
www.ramada.pt

## Romania

BÖHLER-UDDEHOLM Romania SRL  
Atomistilor Str. No 96-102  
077125 - com. Magurele, Jud. Ilfov.  
Telephone: +40 214 575007  
Telefax: +40 214 574212

## Russia

UDDEHOLM TOOLING CIS  
9A, Lipovaya Alleya, Office 509  
RU-197183 Saint Petersburg  
Telephone: +7 812 6006194  
www.uddeholm.ru

## Slovakia

Bohler-Uddeholm Slovakia s.r.o.  
divizia UDDEHOLM  
Čsl.Armády 5622/5  
SK-036 01 Martin  
Telephone: +421 (0)434 212 030  
www.uddeholm.sk

## Slovenia

*Representative office*  
UDDEHOLM  
Divisione della Bohler Uddeholm  
Italia S.p.A.  
Via Palizzi, 90  
IT-20157 Milano  
Telephone: +39 02 39 49 211  
www.uddeholm.it

## Spain

*Head office*  
UDDEHOLM  
Guifré 690-692  
ES-08918 Badalona, Barcelona  
Telephone: +34 93 460 1227  
www.acerosuddeholm.com

### Branch office

UDDEHOLM  
Barrio San Martín de Arteaga,132  
Pol.Ind. Torrelarragoiti  
ES-48170 Zamudio (Bizkaia)  
Telephone: +34 94 452 13 03

## Sweden

*Head office*  
UDDEHOLM TOOLING SVENSKA AB  
Aminogatan 25  
SE-431 53 Mölndal  
Telephone: +46 31 67 98 50  
www.uddeholm.se

### Branch offices

UDDEHOLM TOOLING SVENSKA AB  
Box 45  
SE-334 21 Anderstorp  
Telephone: +46 371 160 15

UDDEHOLM TOOLING SVENSKA AB  
Box 148  
SE-631 03 Eskilstuna  
Telephone: +46 16 15 79 00

UDDEHOLM TOOLING SVENSKA AB  
Aminogatan 25  
SE-431 53 Mölndal  
Telephone: +46 31 67 98 70

UDDEHOLM TOOLING SVENSKA AB  
Nya Tanneforsvägen 96  
SE-582 42 Linköping  
Telephone: +46 13 15 19 90

UDDEHOLM TOOLING SVENSKA AB  
Derbyvägen 22  
SE-212 35 Malmö  
Telephone: +46 40 22 32 05

UDDEHOLM TOOLING SVENSKA AB  
Honnörsgatan 16A  
SE-352 36 Växjö  
Telephone: +46 470 457 90

## Switzerland

HERTSCH & CIE AG  
General Wille Strasse 19  
CH-8027 Zürich  
Telephone: +41 44 208 16 66  
www.hertsch.ch

## Turkey

*Head office*  
ASSAB Korkmaz Celik A.S.  
Organize Sanayi Bölgesi  
2. Cadde No: 26 Y. Dudullu  
34776 Umraniye  
Istanbul Turkey  
Telephone: +90 216 420 1926-121/124  
www.assabkorkmaz.com

## America

### Argentina

ACEROS BOHLER UDDEHOLM S.A  
Mozart 40  
1619-Centro Industrial Garin  
Garin-Prov.  
AR-Buenos Aires  
Telephone: +54 332 7444 440  
www.uddeholm.com.ar

### Brazil

AÇOS BOHLER-UDDEHOLM DO  
BRASIL LTDA- DIV. UDDEHOLM  
Estrada Yae Massumoto, 353  
CEP 09842-160  
BR-Sao Bernardo do Campo - SP Brazil  
Telephone: +55 11 4393 4560, 4554  
www.uddeholm.com.br

### Canada

Head Office & Warehouse  
UDDEHOLM  
2595 Meadowvale Blvd.  
Mississauga, ON L5N 7Y3  
Telephone: +1 905 812 9440  
www.bucanada.com

Branch Warehouses  
UDDEHOLM  
3521 Rue Ashby  
St. Laurent, QC H4R 2K3  
Telephone: +1 514 333 8000

UDDEHOLM  
730 Eaton Way - Unit #10  
New Westminster, BC V3M 6J9  
Telephone: +1 604 525 3354

Heat Treating  
THERMO-TECH  
2645 Meadowvale Blvd.  
Mississauga, ON L5N 7Y4  
Telephone: +1 905 812 9440

### Colombia

AXXECOL S.A.  
Carrera 35 No 13-20  
Apartado Aereo 80718  
CO-Bogota 6  
Telephone: +57 1 2010700  
www.axxecol.com

ASTECO S.A.  
Carrera 54 No 35-12  
Apartado Aereo 663  
CO-Medellin  
Telephone: +57 4 2320122  
www.asteco.com

### Dominican Republic

RAMCA, C. POR A.  
P-2289  
P.O. Box 025650  
Miami, FL 33102  
Telephone: +1 809 682 4011  
domrep@assab.com

### Ecuador

IVAN BOHMAN C.A.  
Apartado 1317  
Km 6 1/2 Via a Daule  
Guayaquil  
Telephone: +593 42 254111

IVAN BOHMAN C.A.  
Casilla Postal 17-01370  
Quito  
Telephone: +593 2 2248001

### El Salvador

ACAUSA DE C.V.  
25a. Avenida Sur 463  
zona 1  
Apartado Postal 439  
SV-San Salvador  
Telephone: +503 22 711700  
www.acavisa.com

### Guatemala

IMPORTADORA ESCANDINAVA  
Apartado postal 11C  
GT-Guatemala City, Guatemala  
Telephone: +502 23 659270  
guatemala@assab.com

### Mexico

Head office  
ACEROS BOHLER UDDEHOLM S.A.  
de C.V.  
Calle Ocho No 2, Letra "C"  
Fraccionamiento Industrial Alce Blanco  
C.P. 52787 Naucalpan de Juarez  
MX-Estado de Mexico  
Telephone: +52 55 9172 0242  
www.bu-mexico.com

Branch office  
BOHLER-UDDEHOLM MONTERREY,  
NUEVO LEON  
Lerdo de Tejada No.542  
Colonia Las Villas  
MX-66420 San Nicolas de Los Garza,  
N.L.  
Telephone: +52 81 83 525239

### Peru

C.I.P.E.S.A.  
Av. Oscar R. Benavides  
(ante Colonial) No. 2066  
PE-Lima 1  
Telephone: +51 1 336 8673  
peru@assab.com

### U.S.A.

Head Office  
UDDEHOLM  
4902 Tollview Drive  
Rolling Meadows IL 60008  
Telephone: 1-847-577-2220  
Sales phone: 1-800-638-2520  
www.bucorp.com

Region East Warehouse  
UDDEHOLM  
220 Cherry Street  
Shrewsbury MA 01545

Region Central Warehouse  
UDDEHOLM  
548 Clayton Ct.  
Wood Dale IL 60191

Region West Warehouse  
UDDEHOLM  
9331 Santa Fe Springs Road  
Santa Fe Springs, CA 90670

### Venezuela

PRODUCTOS HUMAR C.A.  
Multicentro Empresarial del Este,  
Edf Libertador, Núcleo A.  
Piso 9, Of. A-93, Chacao  
VE-Caracas 1060  
Telephone: +58 212 2655040  
humar@assab.com

### Other Countries in America

ASSAB INTERNATIONAL AB  
Box 42  
SE-171 11 Solna, Sweden  
Telephone: +46 8 564 616 70  
www.assab.se

## Asia & Pacific

### Australia

BOHLER UDDEHOLM Australia  
129-135 McCredie Road  
Guildford NSW 2161  
Private Bag 14  
AU-Sydney  
Telephone: +61 2 9681 3100  
www.buau.com.au

### Bangladesh

ASSAB INTERNATIONAL AB  
P.O. Box 17595  
Jebel Ali  
AE-Dubai  
Telephone: +971 488 12165  
www.assab.se

### North China

Head office  
ASSAB Tooling (Beijing) Co Ltd  
No.10A Rong Jing Dong Jie  
Beijing Economic Development Area  
Beijing 100176, China  
Telephone: +86 10 6786 5588  
www.assabsteels.com

Branch offices  
ASSAB Tooling (Beijing) Ltd  
Dalian Branch  
8 Huanghai Street, Haerbin Road  
Economic & Technical Develop. District  
Dalian 116600, China  
Telephone: +86 411 8761 8080

ASSAB Qingdao Office  
Room 2521, Kexin Mansion  
No. 228 Liaoning Road, Shibei District  
Qingdao 266012, China  
Telephone: +86 532 8382 0930

ASSAB Tianjin Office  
No.12 Puwangli Wanda Xincheng  
Xinyibai Road, Beichen District  
Tianjin 300402, China  
Telephone: +86 22 2672 0006

### Central China

Head office  
ASSAB Tooling Technology  
(Shanghai) Co Ltd  
No. 4088 Humin Road  
Xinzhuang Industrial Zone  
Shanghai 201108, China  
Telephone: +86 21 5442 2345  
www.assabsteels.com

Branch offices  
ASSAB Tooling Technology  
(Ningbo) Co Ltd  
No. 218 Longjiaoshan Road  
Vehicle Part Industrial Park  
Ningbo Economic & Technical Dev.  
Zone  
Ningbo 315806, China  
Telephone: +86 574 8680 7188

ASSAB Tooling Technology  
(Chongqing) Co Ltd  
Plant C, Automotive Industrial IPark  
Chongqing Economic & Technological  
Development Zone  
Chongqing 401120, China  
Telephone: +86 23 6745 5698

### South China

Head office  
ASSAB Steels (HK) Ltd  
Room 1701-1706  
Tower 2 Grand Central Plaza  
138 Shatin Rural Committee Road  
Shatin NT - Hong Kong  
Telephone: +852 2487 1991  
www.assabsteels.com

#### Branch offices

ASSAB Tooling (Dongguan) Co Ltd  
Northern District  
Song Shan Lake Science & Technology  
Industrial Park  
Dongguan 523808, China  
Telephone: +86 769 2289 7888  
www.assabsteels.com

ASSAB Tooling (Xiamen) Co Ltd  
First Floor: Universal Workshop  
No. 30 Huli Zone  
Xiamen 361006, China  
Telephone: +86 592 562 4678

### Hong Kong

ASSAB Steels (HK) Ltd  
Room 1701-1706  
Grand Central Plaza, Tower 2  
138 Shatin Rural Committee Road  
Shatin NT, Hong Kong  
Telephone: +852 2487 1991  
www.assabsteels.com

### India

ASSAB Sripad Steels LTD  
T 303 D.A.V. Complex  
Mayur Vihar Ph I Extension  
IN-Delhi-110 091  
Telephone: +91 11 2271 2736  
www.assabsripadsteels.com

ASSAB Sripad Steels LTD  
709, Swastik Chambers  
Sion-Trombay Road  
Chembur  
IN-Mumbai-400 071  
Telephone: +91 22 2522-7110, -8133

ASSAB Sripad Steels LTD  
Padmalaya Towers  
Janaki Avenue  
M.R.C. Nagar  
IN-Chennai-600 028  
Telephone: +91 44 2495 2371

ASSAB Sripad Steels LTD  
19X, D. P. P. Road  
Naktola Post Office  
IN-Kolkata-700 047  
Telephone: +91 (33) 400 1645

ASSAB Sripad Steels LTD  
Ground floor, Plot No 11-6-8  
Opp IDPL Factory Out Gate  
Balanagar  
IN-Hyderabad-500 037  
Telephone: +91 (40) 2377 8148

### Indonesia

Head office  
PT ASSAB Steels Indonesia  
Jl. Rawagelam III No. 5  
Kawasan Industri Pulogadung  
Jakarta 13930, Indonesia  
Telephone: +62 21 461 1314  
www.assabsteels.com

#### Branch offices

SURABAYA BRANCH  
Jl. Berbek Industri 1/23  
Surabaya Industrial Estate, Rungkut  
Surabaya 60293, East Java, Indonesia  
Telephone: +62 31 843 2277

MEDAN BRANCH  
Komplek Griya Riatur Indah  
Blok A No.138  
Jl. T. Amir Hamzah  
Halvetia Timur, Medan 20124  
Telephone: +62 61 847 7935/6

BANDUNG BRANCH  
Komp. Ruko Bumi Kencana  
Jl. Titian Kencana Blok E  
No.5 Bandung 40233  
Telephone: +62 22 604 1364

**TANGERANG BRANCH**  
Pusat Niaga Cibodas  
Blok C No. 7 Tangerang  
Telephone: +62 21 921 9596, 551 2732

**SEMARANG BRANCH**  
Jl. Imam Bonjol No.155  
R.208 Semarang 50124  
Telephone: +62 358 8167

## Iran

ASSAB INTERNATIONAL AB  
P.O. Box 19395  
IR-1517 TEHRAN  
Telephone: +98 21 888 35392  
www.assabiran.com

## Israel

PACKER YADPAZ QUALITY  
STEELS Ltd  
P.O. Box 686  
Ha-Yarkon St. 7, Industrial Zone  
IL-81106 YAVNE  
Telephone: +972 8 932 8182  
www.packer.co.il

## Japan

UDDEHOLM KK  
Atago East Building  
3-16-11 Nishi Shinbashi  
Minato-ku, Tokyo 105-0003, Japan  
Telephone: + 81 3 5473 4641  
www.assabsteels.com

## Jordan

ENGINEERING WAY Est.  
P.O. Box 874  
Abu Alanda  
JO-AMMAN 11592  
Telephone: +962 6 4161962  
engineeringway@assab.com

## Malaysia

*Head office*  
ASSAB Steels (Malaysia) Sdn Bhd  
Lot 19, Jalan Perusahaan 2  
Batu Caves Industrial Estate  
68100 Batu Caves  
Selangor Malaysia  
Telephone: +60 3 6189 0022  
www.assabsteels.com

### Branch offices

**BUTTERWORTH BRANCH**  
Plot 146a  
Jalan Perindustrial Bukit Minyak 7  
Kawasan Perindustrial Bukit Minyak  
14000 Bukit Mertajam, SPT Penang  
Telephone: +60 4 507 2020

### JOHOR BRANCH

No. 8, Jalan Persiaran Teknologi  
Taman Teknologi  
81400 Senai  
Johor DT, Malaysia  
Telephone: +60 7 598 0011

## New Zealand

VIKING STEELS  
25 Beach Road, Otahuhu  
P.O. Box 13-359, Onehunga  
NZ-Auckland  
Telephone: +64 9 270 1199  
www.ssm.co.nz

## Pakistan

ASSAB International AB  
P.O. Box 17595  
Jebel Ali  
AE-Dubai  
Telephone: +971 488 12165  
www.assab.se

## Philippines

ASSOCIATED SWEDISH STEELS  
PHILS Inc.  
No. 3 E. Rodriguez Jr., Avenue  
Bagong Ilog, Pasig City  
Philippines  
Telephone: +632 671 1953/2048  
www.assabsteels.com

## Republic of Korea

### Head office

ASSAB Steels (Korea) Co Ltd  
116B-8L, 687-8, Kojan-dong  
Namdong-ku  
Incheon 405-310, Korea  
Telephone: +82 32 821 4300  
www.assabsteels.com

### Branch offices

**BUSAN BRANCH**  
14B-5L, 1483-9, Songjeong-dong  
Kangseo-ku, Busan 618-270, Korea  
Telephone: +82 51 831 3315

### DAEGU BRANCH

Room 27, 7-Dong2 F  
Industry Materials Bldg.1629  
Sangyeog-Dong, Buk-Ku  
Korea-Daegu 702-710  
Telephone: +82 53 604 5133

## Lebanon

WARDE STEEL & METALS SARL MET  
Charles Helou Av, Warde Bldg  
P.O. Box 165886  
LB-Beirut  
Telephone: +961 1 447228  
lebanon@assab.com

## Saudi Arabia

ASSAB INTERNATIONAL AB  
P.O. Box 255092  
SA-Riyadh 11353  
Telephone: +966 1 4466542  
saudiarabia@assab.com

## Singapore

### Head office Pacific

ASSAB Pacific Pte Ltd  
171, Chin Swee Road  
No. 07-02, SAN Centre  
SG-Singapore 169877  
Telephone: +65 6534 5600  
www.assabsteels.com

### Jurong

ASSAB Steels Singapore (Pte) Ltd  
18, Penjuru Close  
SG-608616 Singapore  
Telephone: +65 6862 2200

## Sri Lanka

GERMANIA COLOMBO PRIVATE Ltd.  
451/A Kandy Road  
LK-Kelaniya  
Telephone: +94 11 2913556  
www.iwsholdings.com

## Syria

WARDE STEEL & METALS SARL MET  
Charles Helou Av, Warde Bldg  
P.O. Box 165886  
LB-Beirut  
Telephone: +961 1 447228  
lebanon@assab.com

## Taiwan

### Head office

ASSAB Steels (Taiwan) Co Ltd  
No. 112 Wu Kung 1st Rd.  
Wu Ku Industry Zone  
TW-Taipei 248-87, Taiwan (R.O.C.)  
Telephone: +886 2 2299 2849  
www.assabsteels.com

### Branch offices

**NANTOU BRANCH**  
No. 10, Industry South 5th Road  
Nan Kang Industry Zone  
Nantou 540-66, Taiwan (R.O.C.)  
Telephone: +886 49 225 1702  
**TAINAN BRANCH**  
No. 180, Yen He Street,  
Yong Kang City  
Tainan 710-82, Taiwan (R.O.C.)  
Telephone: +886 6 242 6838

## Thailand

ASSAB Steels (Thailand) Ltd  
9/8 Soi Theedintai,  
Taeparak Road, Bangplee,  
Samutprakarn 10540, Thailand  
Telephone: +66 2 385 5937,  
+66 2 757 5017  
www.assabsteels.com

## United Arab Emirates

ASSAB INTERNATIONAL AB  
P.O. Box 17595  
Jebel Ali  
AE-Dubai  
Telephone: +971 488 12165  
www.assab.se

## Vietnam

CAM Trading Steel Co Ltd  
90/8 Block 5, Tan Thoi Nhat Ward  
District 12, Ho Chi Minh City  
Vietnam  
Telephone: +84 8 5920 920  
www.assabsteels.com

## Other Asia

ASSAB INTERNATIONAL AB  
Box 42  
E-171 11 Solna, Sweden  
Telephone: +46 8 564 616 70  
www.assab.se

# Africa

## Egypt

UNITED FOR IMPORT AND  
INDUSTRIAL SUPPLIES  
Montaser Project No 20  
Flat No 14  
Al Ahram Street-El Tabia  
EG-Giza Cairo  
Telephone: +20 2 7797751  
www.assab.se

## Kenya

SANDVIK Kenya Ltd  
P.O. Box 18264  
Post code 00500  
KE-Nairobi  
Telephone: +254 20 532 866  
sandvik@africaonline.co.ke

## South Africa

UDDEHOLM Africa (Pty.) Ltd.  
P.O. Box 539  
ZA-1600 Isando/Johannesburg  
Telephone: +27 (11) 974 2791  
www.bohler-uddeholm.co.za

## Tunisia

MCM Distribution  
4 Bis, Rue 8610 - Z.I.  
2035 Chargula 1  
TN-Tunis  
Telephone: + 216 71 802479  
www.mcm.com.tn


## Zimbabwe

### Representative office:

UDDEHOLM Africa (Pty.) Ltd.  
P.O. Box 539  
ZA-1600 Isando/Johannesburg  
Telephone: +27 11 974 2781  
www.bohler-uddeholm.co.za

## Other African Countries

ASSAB INTERNATIONAL AB  
Box 42  
SE-171 11 Solna, Sweden  
Telephone: +46 8 564 616 70  
www.assab.se

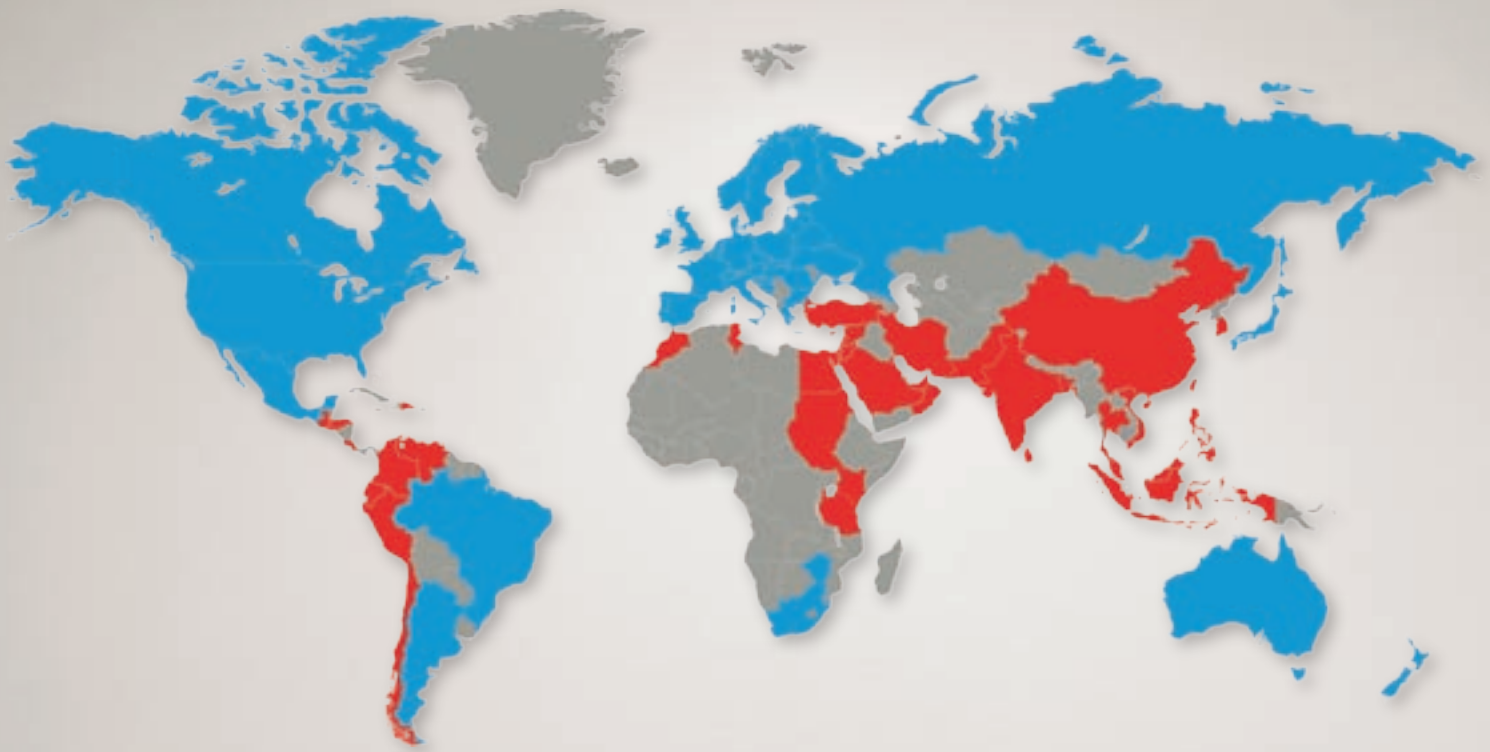

## Network of excellence

Uddeholm is present on every continent. This ensures you high-quality Swedish tool steel and local support wherever you are. Assab is our wholly-owned subsidiary and exclusive sales channel, representing Uddeholm in various parts of the world. Together we secure our position as the world's leading supplier of tooling materials.

Uddeholm is the world's leading supplier of tooling materials. This is a position we have reached by improving our customers' everyday business. Long tradition combined with research and product development equips Uddeholm to solve any tooling problem that may arise. It is a challenging process, but the goal is clear – to be your number one partner and tool steel provider.

Our presence on every continent guarantees you the same high quality wherever you are. Assab is our wholly-owned subsidiary and exclusive sales channel, representing Uddeholm in various parts of the world. Together we secure our position as the world's leading supplier of tooling materials. We act worldwide, so there is always an Uddeholm or Assab representative close at hand to give local advice and support. For us it is all a matter of trust – in long-term partnerships as well as in developing new products. Trust is something you earn, every day.

For more information, please visit [www.uddeholm.com](http://www.uddeholm.com) or [www.assab.com](http://www.assab.com)